

KITO
Beyond Your Imagination



KITO
2CM
AN OUTDOOR FAVORITE



GUANGDONG KITO CERAMICS GROUP CO.,LTD.


Building T6, Smart City Jihua 1st Road, Chancheng Dist., Foshan Guangdong 528000, China
Tel: +86 757 82533869 | Fax: +86 757 82533866 | Email: thankyou@kito.cn

www.kito.cn
www.kitoceramics.com





01~02
ABOUT THE BRAND

05~16
9 APPLICATIONS

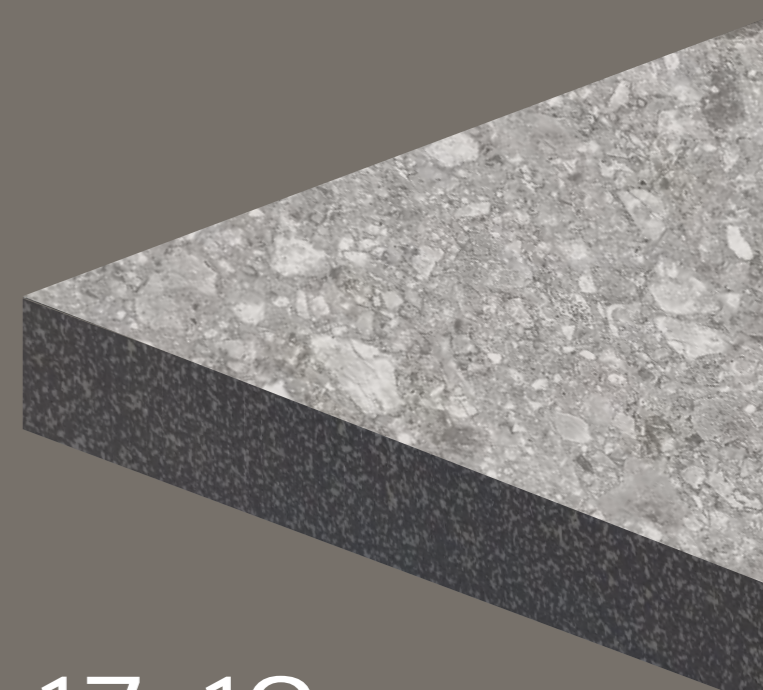

17~19
COLLECTIONS

INDEX

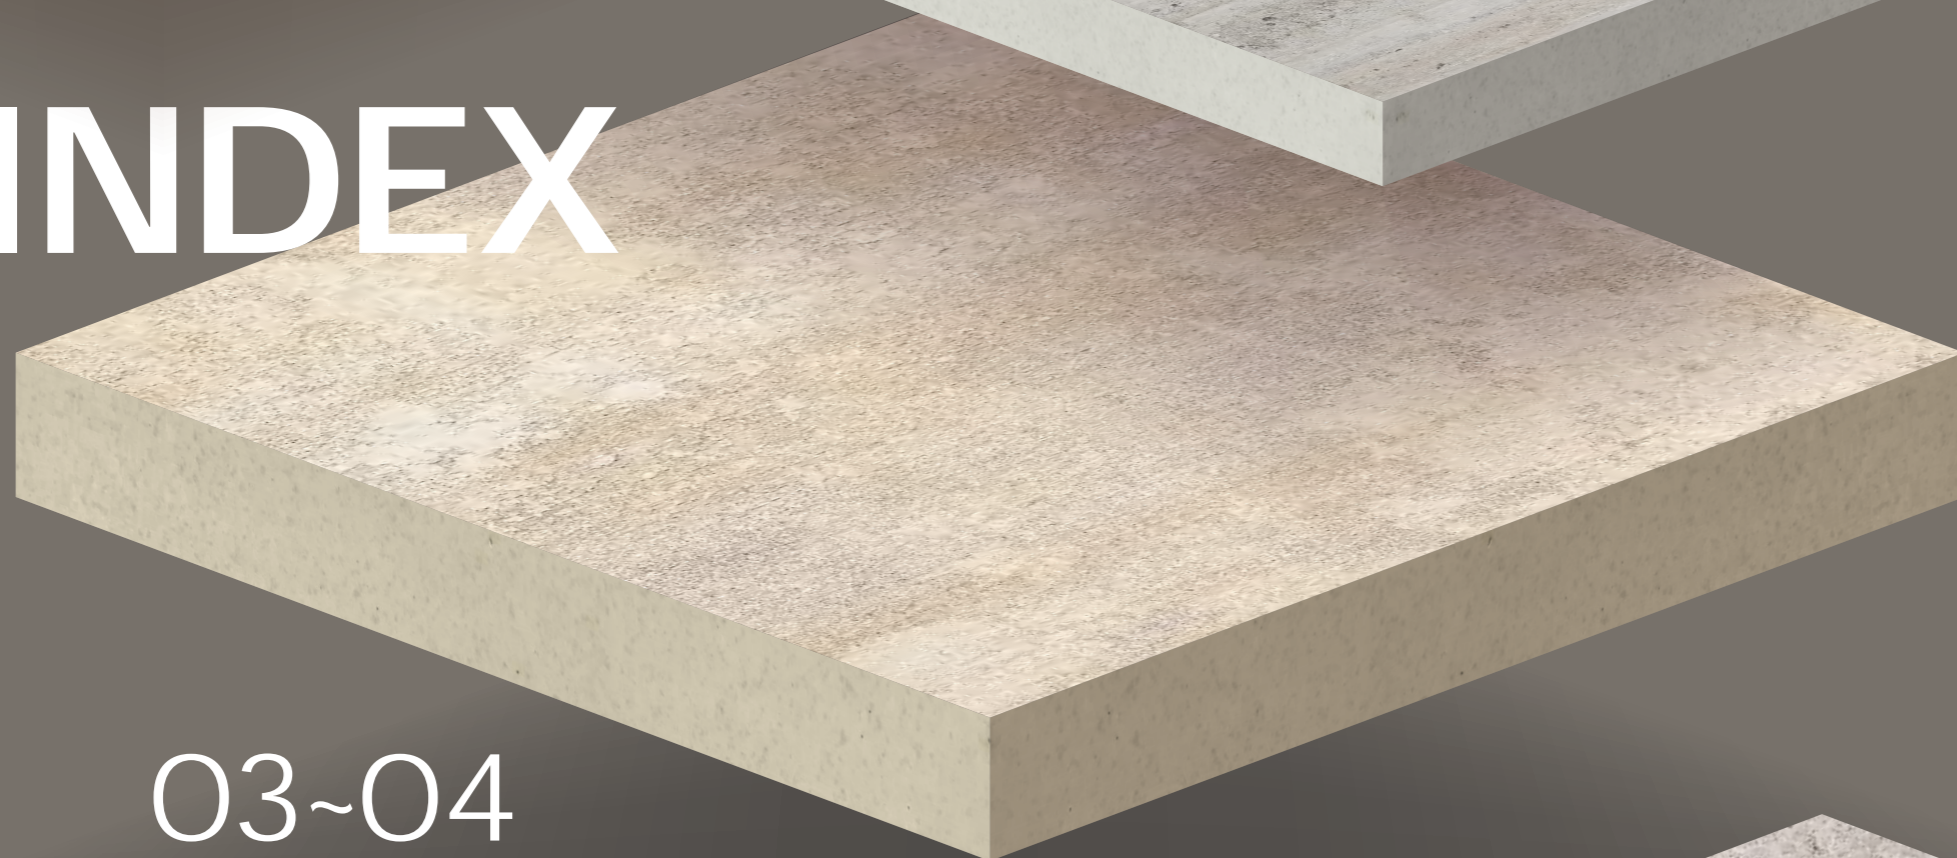

2CM

20
ACCESSORIES

03~04
OUR DIFFERENTIATION &
4 KEY METHODS OF APPLICATION

21~22
PARAMETER INFO





Why KITO
**BEYOND
 YOUR
 IMAGINATION**

**LEADING GLAZED
 TILE MANUFACTURER**

KITO is a specialized porcelain tile manufacturer in Foshan, China, with 15 years of experience in producing top-grade glazed porcelain tiles. The annual output is more than 20 million M2

POWERFUL R&D TEAM SUPPORT

More than 300 engineers and experts including Italian designers
 314 cases awarded the national patents

RICH PRODUCT RANGE

Size: from 148x398mm (6"x16") to 1600x3200mm (64"x128")
 Thickness: 9.2mm to 20mm
 Surface: full polished, honed, lappato, matte, satin and rough finish
 Techniques: screen printing, rotogravure printing, ink-jet printing

TQC SYSTEM

In accordance with EN14411:2016 standard.



2018 China 500 Most Valuable Brands



Three Star Certification Of Green Building Materials



In Accordance With EN14411:2016 Standard



A recognized world leader in testing inspection and certification services (TIC)



SGS is recognized as the global benchmark for quality and integrity

OUR DIFFERENTIATION


Anti-slip R11

KITO 2CM outdoor porcelain tiles reach R11 which provides traction close to that of natural stone. R12 also available for customization



High Breaking Strength

KITO 2CM outdoor porcelain tiles reach a breaking strength of 10,200N. Similar natural stone would be 4cm thick to have the same breaking strength.

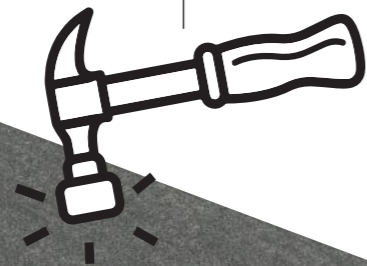

2CM



Full Body

Advanced technologies such as full body tiling, in addition to high pressure and high temperature treatment, are adopted in the manufacturing process. As a result, 2CM outdoor porcelain tiles has high breaking strength, low water absorption ($\leq 0.5\%$) and class 3 abrasion resistance.

Natural Stone Texture

KITO 2CM outdoor porcelain tiles are full 20mm in thickness, which provides an elegant natural stone texture.



4 KEY METHODS OF APPLICATION



EASY TO INSTALL AND MAINTAIN

Laid on gravel



Laid on grass

Laid on mortar

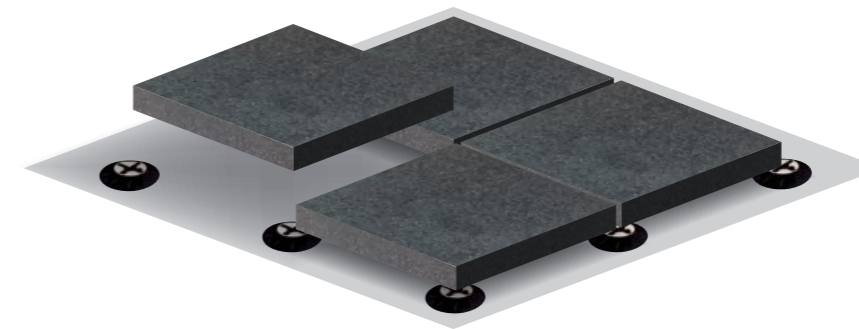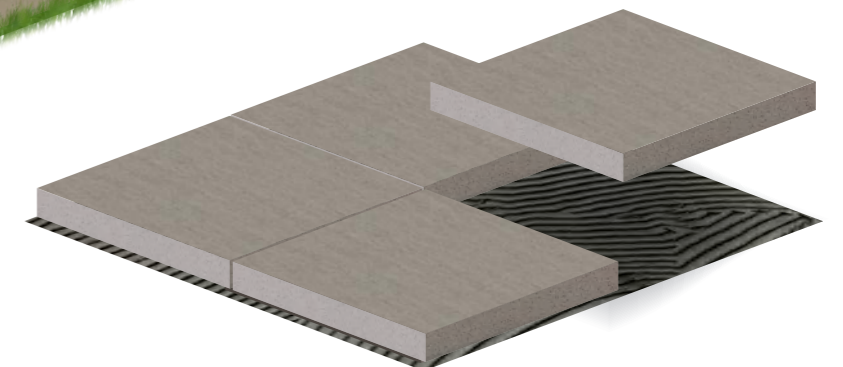

Laid on pedestal



9 APPLICATIONS


KITO 2CM tiles are suitable for various outdoor locations, including swimming pool, balconies and so on.



ON
GRASS



ON
GRAVEL




FRONT &
BACK YARD




OUTDOOR
APPLICATION




SWIMMING
POOL




TRAFFIC
SITE



GARAGE &
PARKING




EXTERNAL
FACADES




STAIRCASE
STEPS

ON GRASS

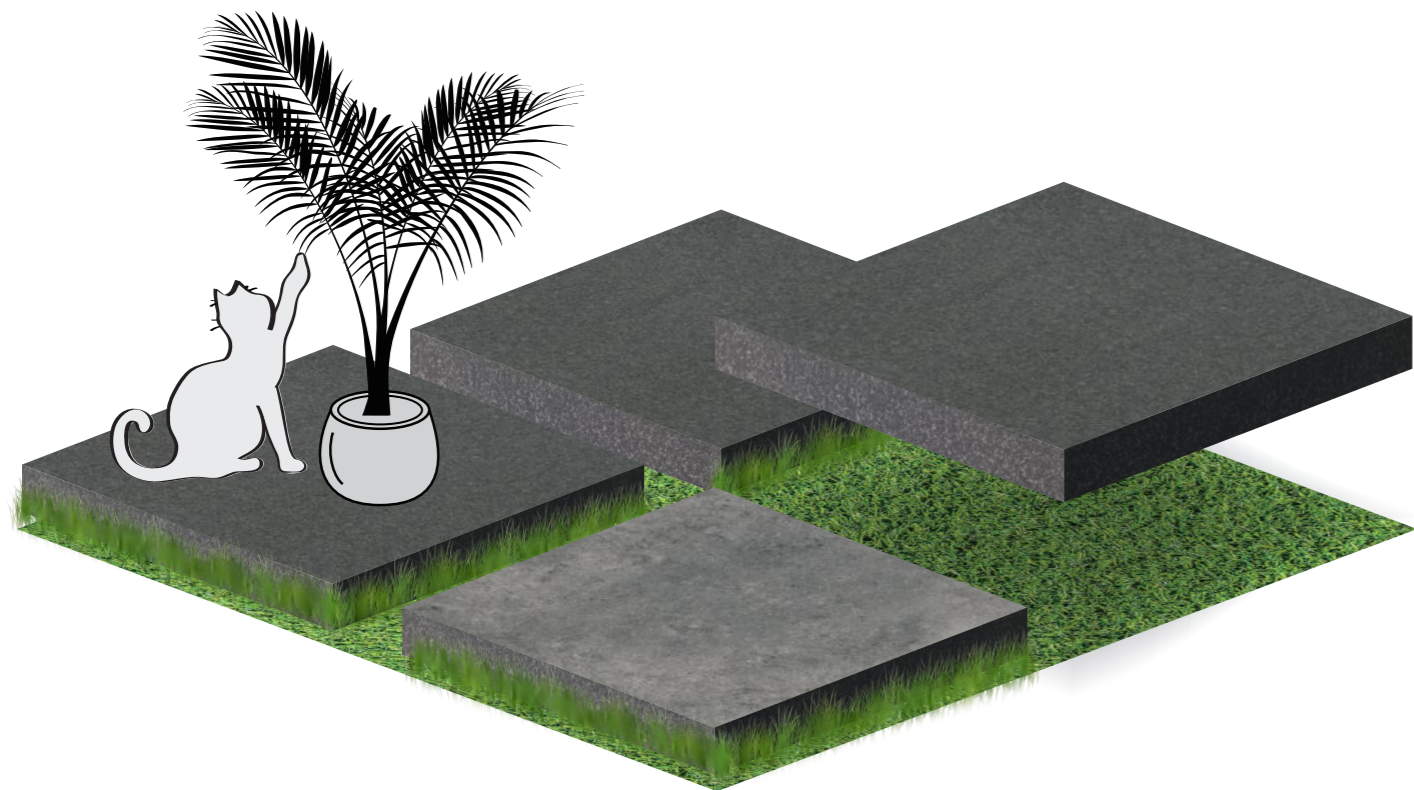


Basalt Stone

K0606529DAZ
600×600×20mm

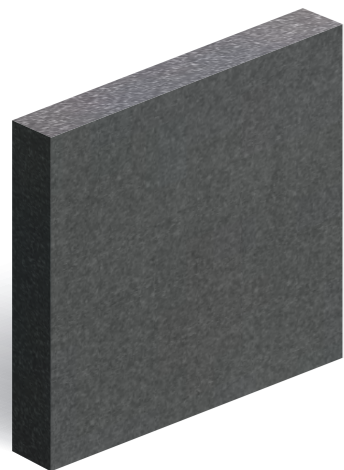


Cement

K0606419DAZ
600×600×20mm

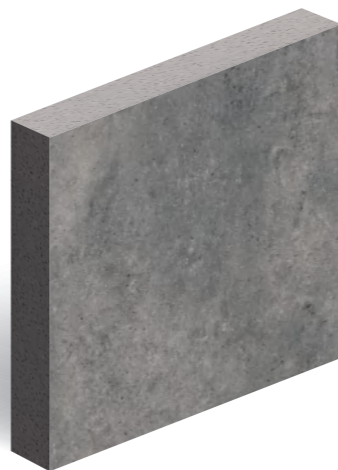

Ales

K0603517DAZ
600×600×20mm

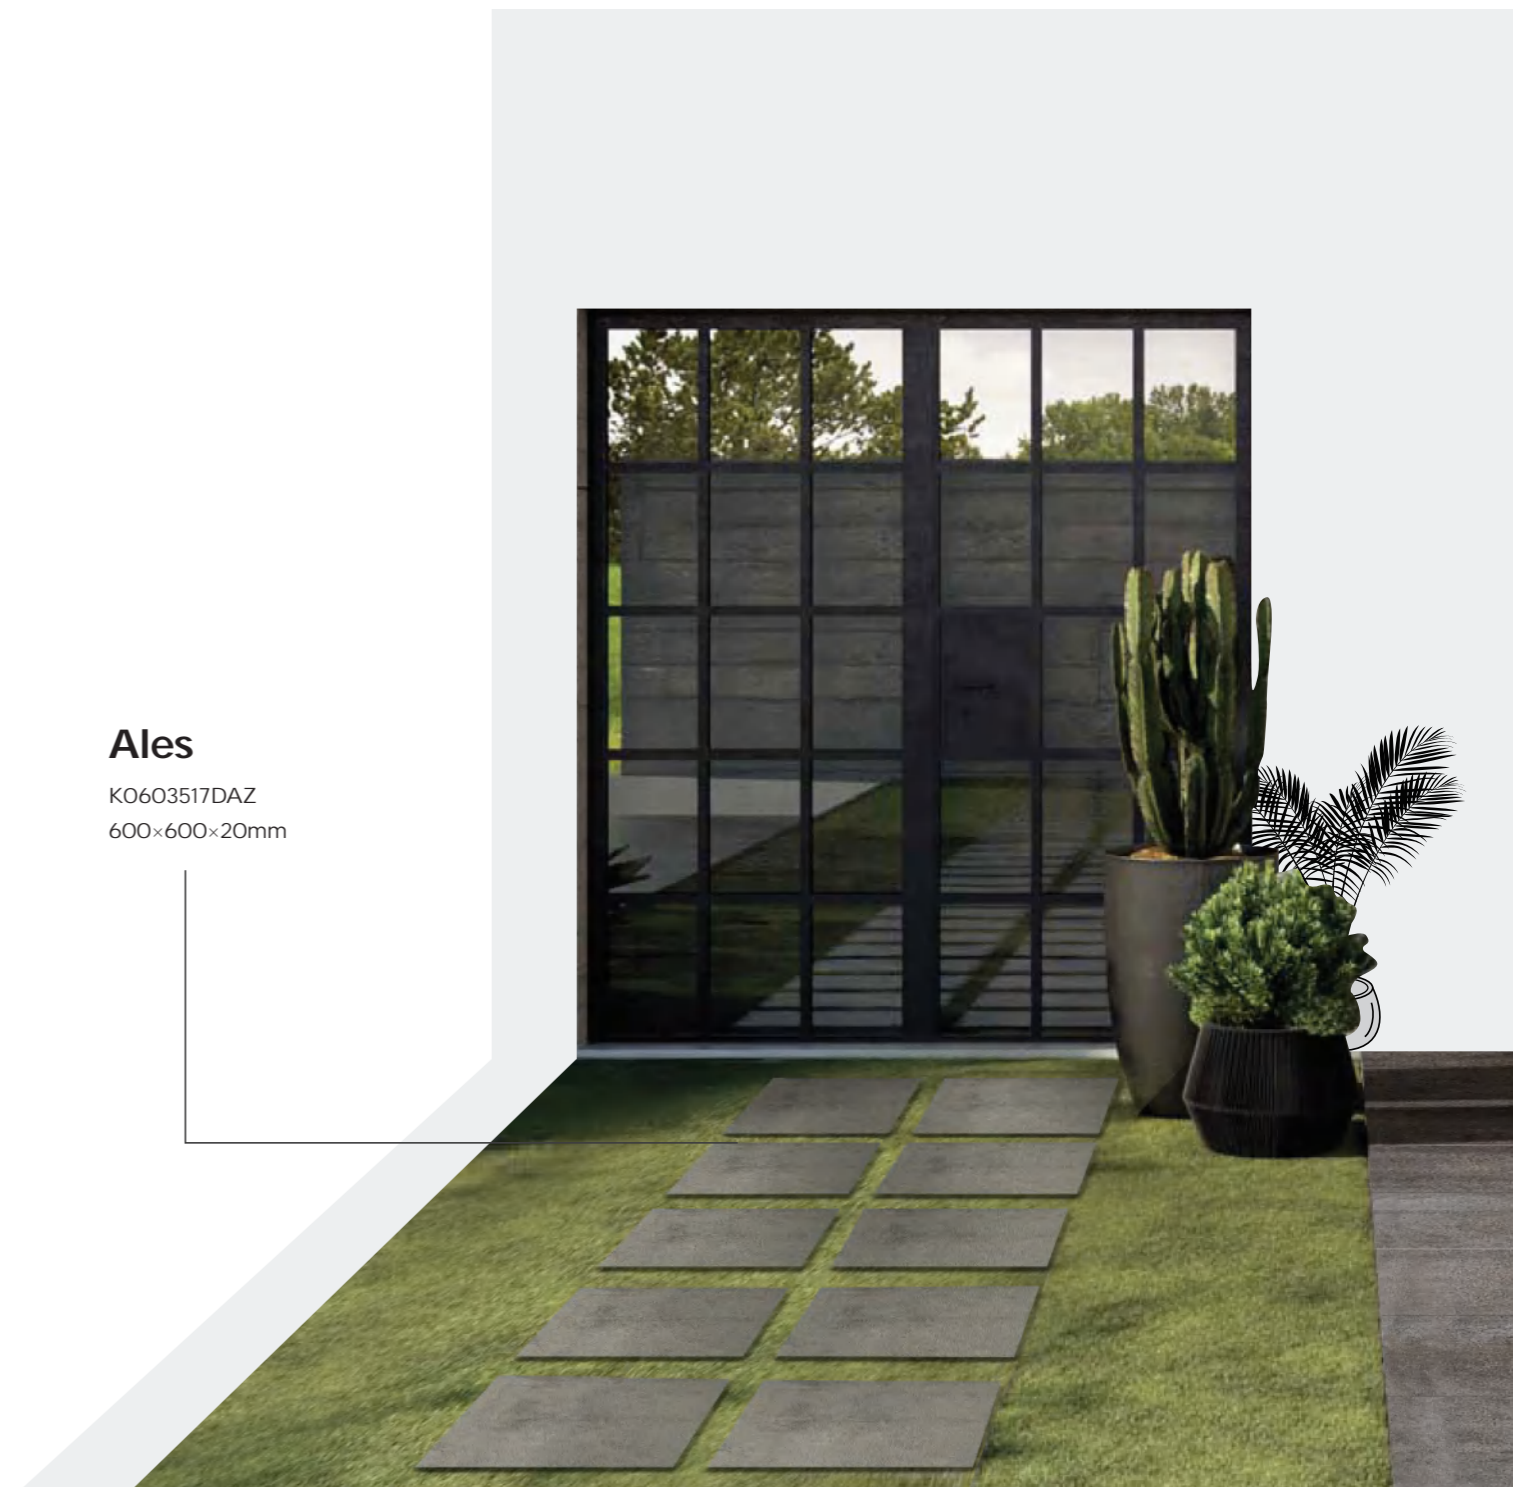

ON GRAVEL



Ales
K0603517DAZ
600×600×20mm

FRONT & BACK YARD



Cassero
K0603522DAZ
600×600×20mm



Cassero
K0603520DAZ
600×600×20mm

OUTDOOR



Ivory Wood
 K00606979ZAO
 600×600×20mm

SWIMMING POOL



Cement
 K0603704DAZ
 600×600×20mm




TRAFFIC SITE



Ales

K0603525DAZ
600×600×20mm

GARAGE & PARKING

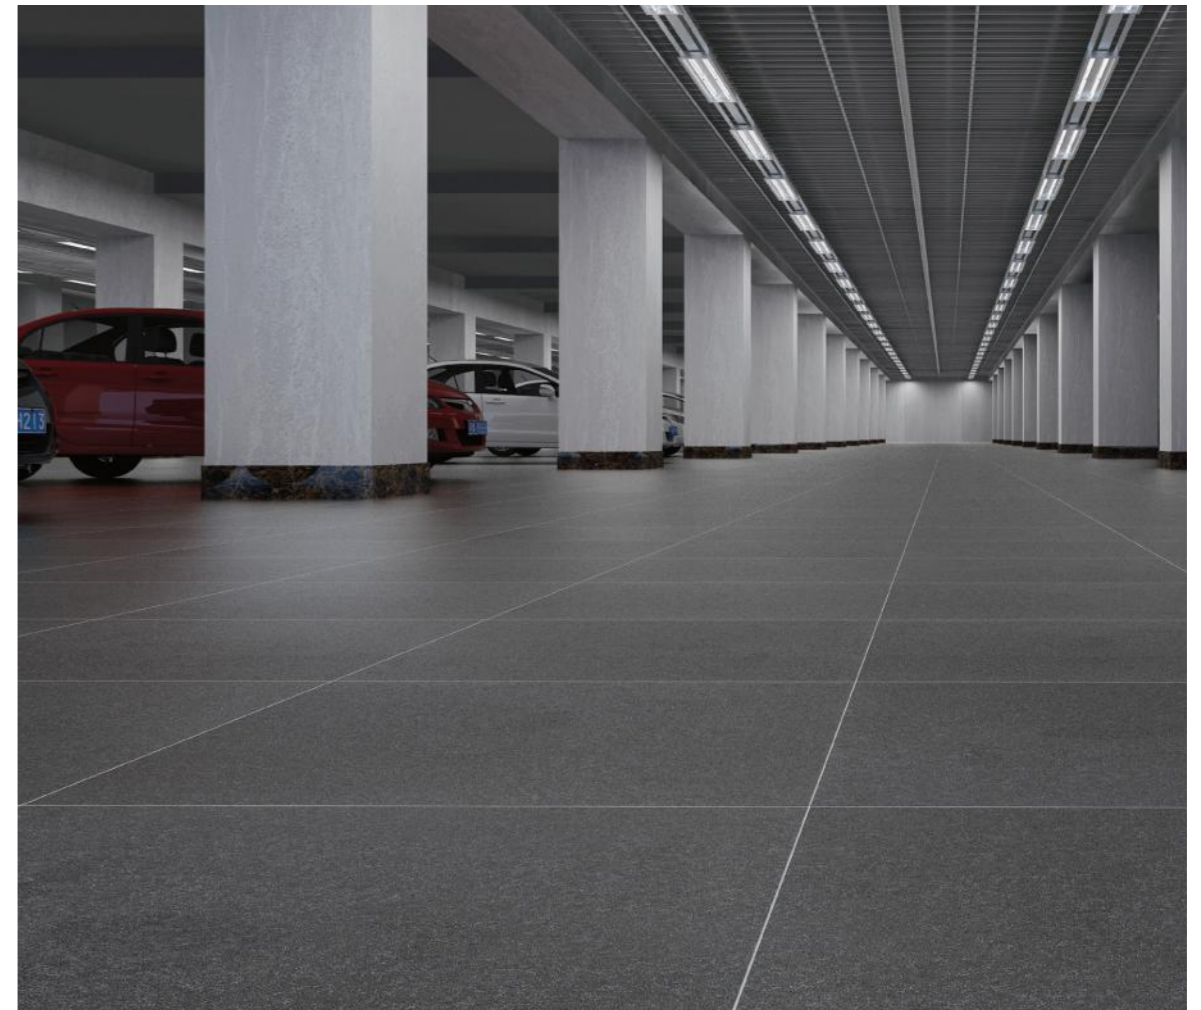


Basalt Stone

K0606033DAZ
600×600×20mm




EXTERNAL FACADES

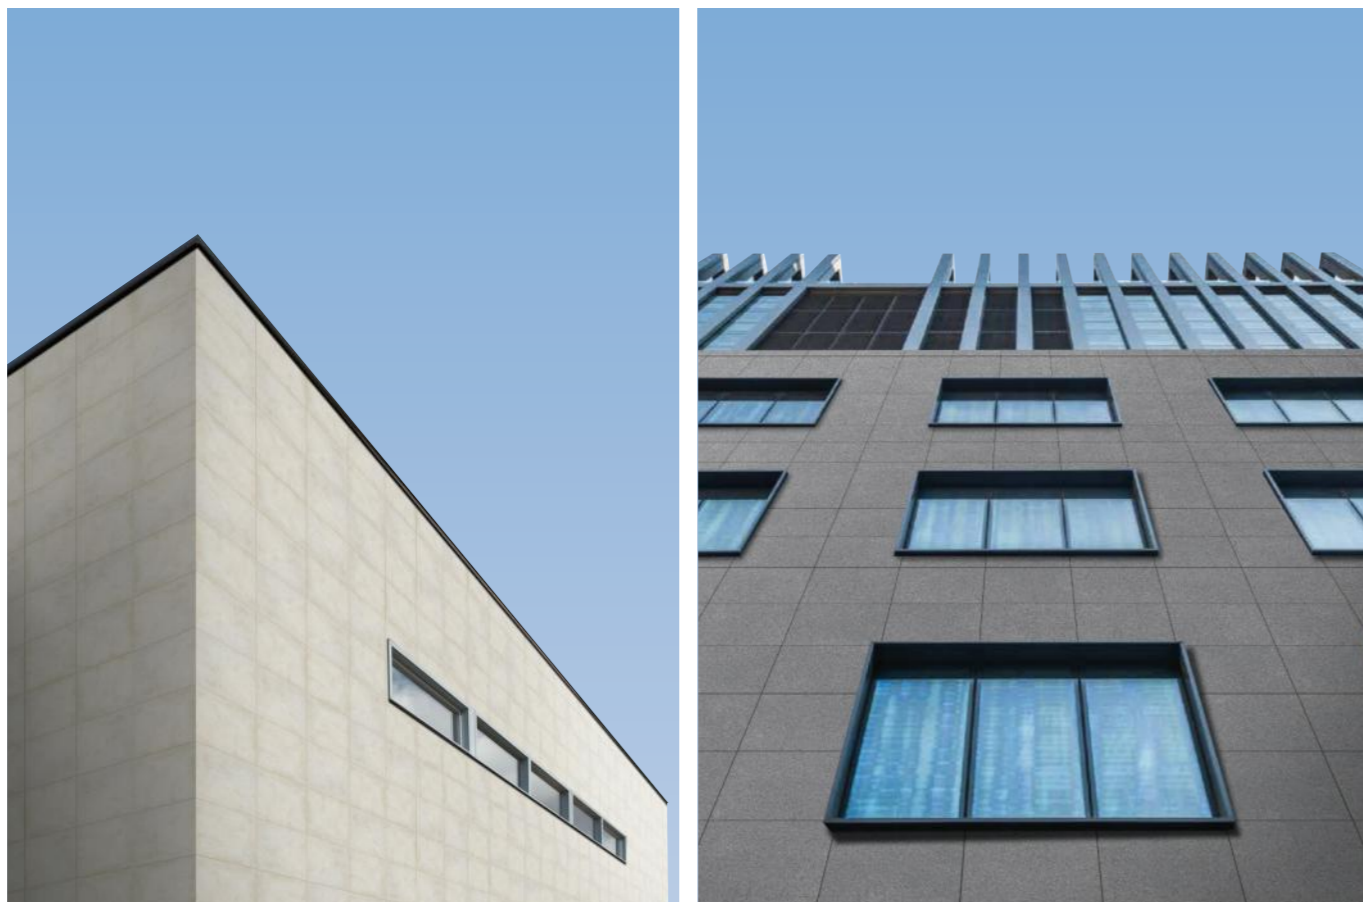

Ales


K0603525DAZ
600×600×20mm

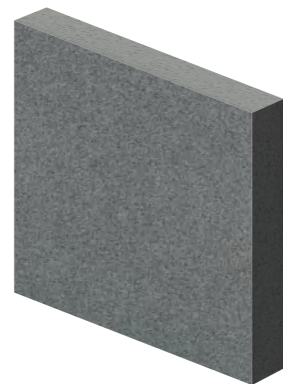

Basalt Stone

K0606503DAZ
600×600×20mm

STAIRCASE STEPS

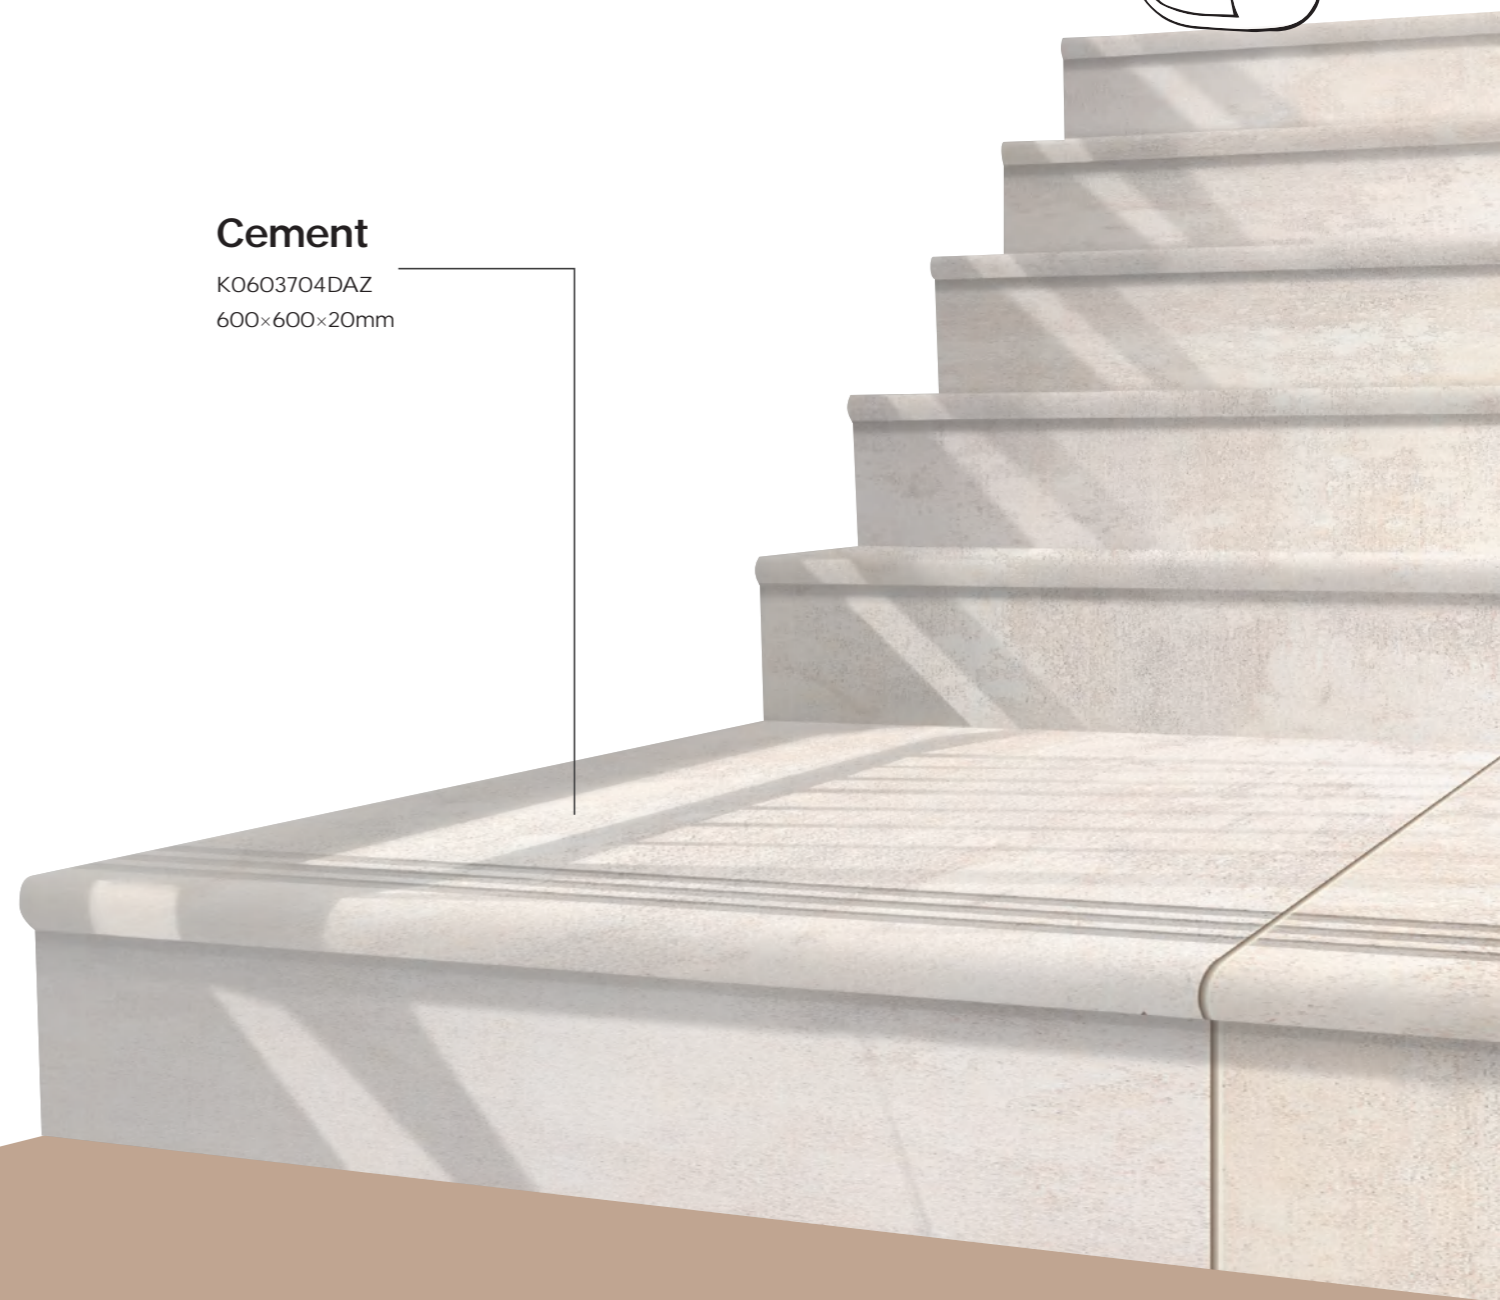

Cement

K0603704DAZ
600×600×20mm

COLLECTIONS

Ales / Cassero/ Trani available size: 1200×600×10mm 600×600×10mm

Ales

600×600×20mm



K0603516DAZ
⌞ 10

K0603517DAZ
⌞ 10

K0603518DAZ
⌞ 10

K0603519DAZ
⌞ 10

K0603525DAZ
⌞ 10

600×1200×20mm




K1263516DAZ
⌞ 5

K1263517DAZ
⌞ 5

K1263525DAZ
⌞ 5

Cassero

600×600×20mm * customized

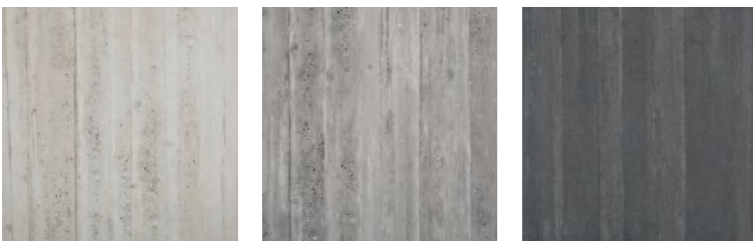

K0603520DAZ
⌞ 12


K0603522DAZ
⌞ 12

* K0603523DAZ
⌞ 12

Trani

600×1200×20mm

600×600×20mm

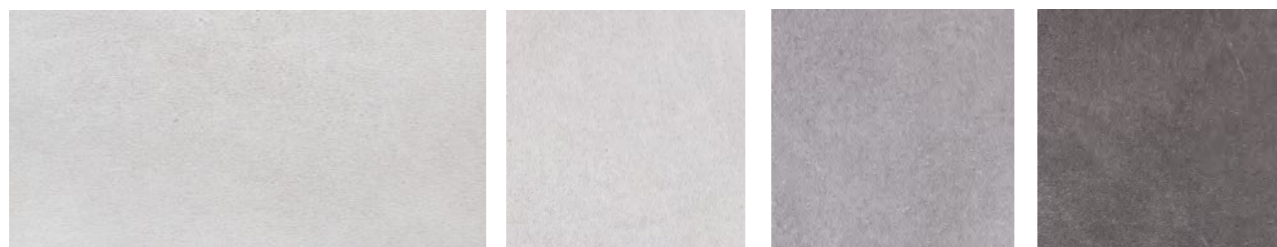

K01268036ZAO
⌞ 6


K00608036ZAO
⌞ 12

K00608037ZAO
⌞ 12

K00608039ZAO
⌞ 12

Basalt Stone

600×600×20mm

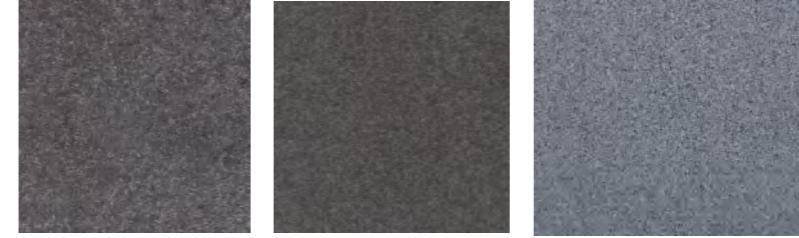


K0606033DAZ
⌞ 1

K0606529DAZ
⌞ 1

K0606503DAZ
⌞ 1

600×1200×20mm

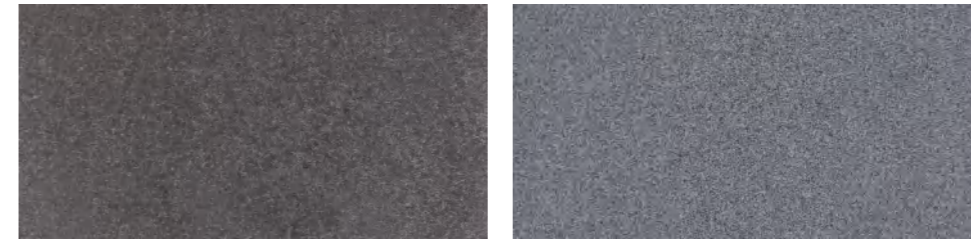

K1266033DAZ
⌞ 1

K1266503DAZ
⌞ 1

Cement

600×1200×20mm

600×600×20mm




K01263704ZAO
⌞ 3

K0603704DAZ
⌞ 3

K0606419DAZ
⌞ 7

Terrazzo

600×600×20mm

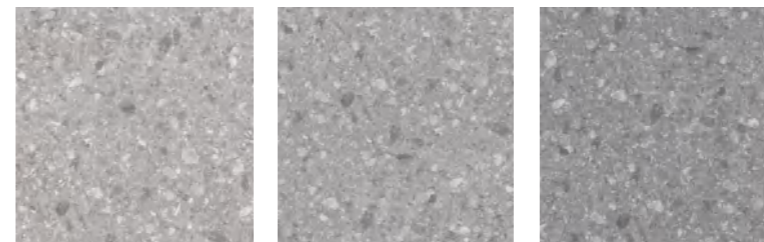

K00606976ZAO
⌞ 6

K00606977ZAO
⌞ 6

K00606978ZAO
⌞ 6

Sandstone
600×600×20mm



K00606980ZAO
⌞ 10



K00606981ZAO
⌞ 10

Ivory Wood
600×600×20mm



K00606979ZAO
⌞ 16

* customized


Limestone
600×600×20mm




*K00606919ZAO
⌞ 7



*K00606906ZAO
⌞ 7



*K00606893ZAO
⌞ 7



*K00606894ZAO
⌞ 7

Terrazzo
600×600×20mm



*K0606801DAZ
⌞ 4

Sand Stone
600×600×20mm




*K0606527DAZ
⌞ 5




*K0606528DAZ
⌞ 1

Cararra
600×600×20mm



*K0606542DAZ
⌞ 10

Slate Stone
600×600×20mm



*K0606418DAZ
⌞ 1


Pietra Carsica
600×600×20mm




*K0603388DAZ
⌞ 20

ACCESSORIES


Drop Face

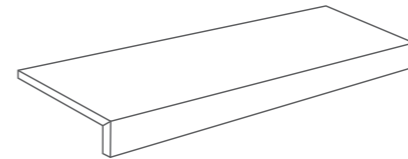


Bullnose

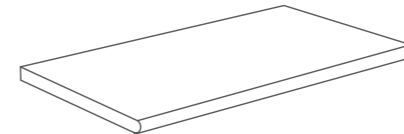


Bullnose
Build up 20mm

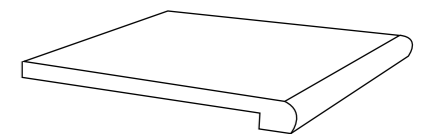


Sink Tile A

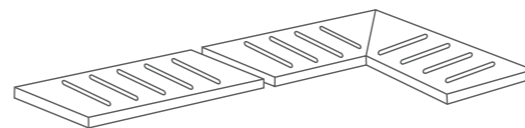

Sink Tile B


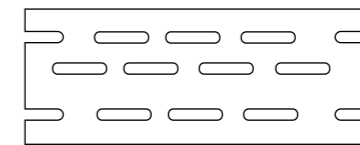


Swimming pool deck tile

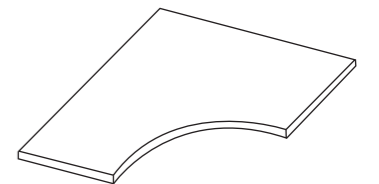


Steps

Stairs tiles are available:
Round edge step + riser / 45° chamfering step + riser

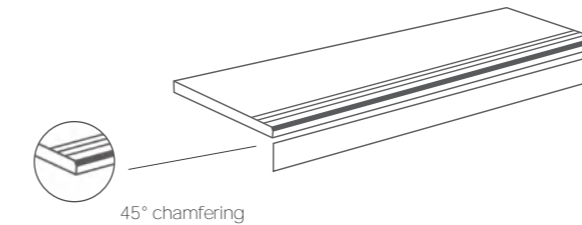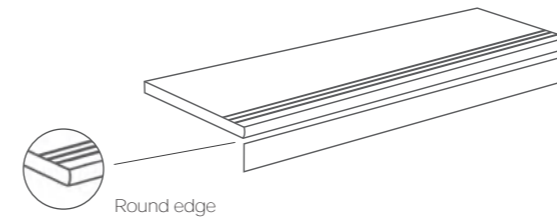



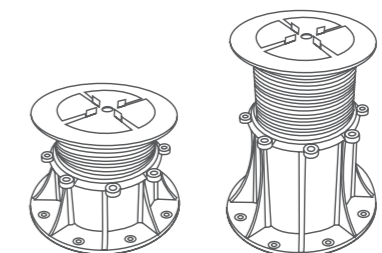





Plastic Pedestal






PARAMETER INFO

PACKING INFO

 Ctn size	600×600×20mm	1200×600×20mm
 Pcs/Ctn	2	1
 M ² /Ctn	0.72	0.72
 Kg/Ctn	34	34

 Pallet size	1.1×1.1m	1.1×1.1m
 Ctn/Pal	40	31
 M ² /Pal	28.8	22.32
 Kg/Pal	1360	1054

 Ctn/Cont	800	775
 Pcs/Cont	576	558
 Kg/Cont	27000	26350

TECHNICAL DATA

 Thickness	20mm
 Water Absorption	Less than 0.5%
 Breaking Strength	≥10200N
 Modulus of Rupture	Minimum ≥35N/mm ²
 Static Coefficient of Friction	Dry: 0.87, Wet: 0.73
 DCOF	0.52
 PEI	Class 4
 Slipperiness	R11