


HD-A513-C 电脑伺服式万能包装材料试验机

HD-A513-C Computer servo universal packaging material testing machine

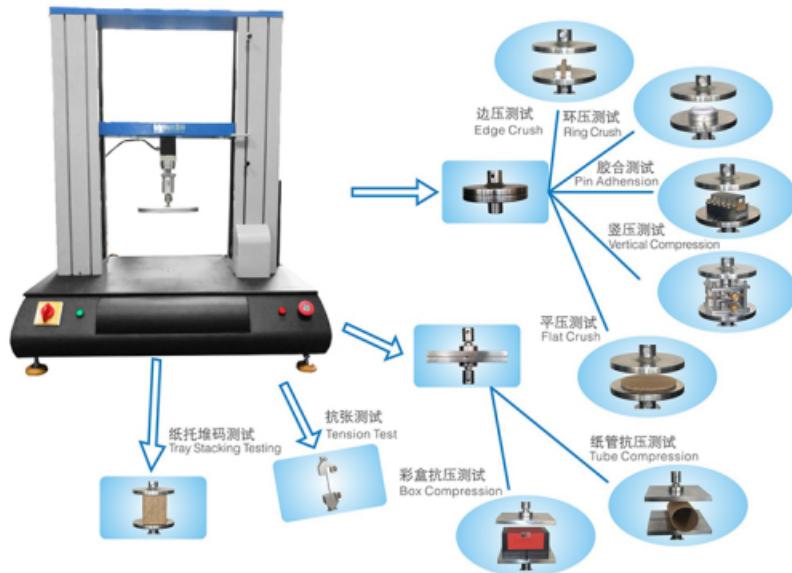

■ 产品简介 Product Description

本系列试验机可配合多种材料做全方位之测试,在纸张包装材料方面,进行多种纸张品质测试,即环压(RCT)、平压(FCT)、边压(ECT)、粘合(PAT)及一般抗压(CMT)等5种测试,是结合多项功能于一身之测试设备。

This series of testing machine can be done with the full range of testing a variety of materials,in paper,packaging materials,can be carry out a variety of paper quality testing,that Ring crush(RCT),flat crush(FCT),Edge compressive(ECT),adhesive strength(PAT)and the general compression(CMT)other 5 kinds of tests,a combination of a number of functions in one of the test equipment.

■ 设计标准 Design criteria

GB/T450

■ 主要技术参数 The main technical parameters

| | |
|-------------------------------------|--|
| 容量选择 Capacity | 200/500kgf 进口传感器; 200/500kgf Import sensor |
| 测试空间 Test space (L*W*H) | 400x500x600mm |
| 测试速度 Test speed | 0.1~300mm/min |
| 控制方式 Control method | 面板控制, LED液晶屏显示+电脑式采用TM2101C先进电脑系统软件控制, windows模式操作 panel control, LED display + computer with TM2101C software control. Windows mode operation |
| 力值控制 Force control | 高精度压力传感器+高性能内核处理器+独立高速采样芯片, 确保准确采样与高速运算处理, 有效保证测试精度 high Precision Pressure Sensors + High performance core processor + the independently high-speed sampling chip to make sure take sample accurate and high speed processing, effectively ensure the accuracy test |
| 外形尺寸 External dimension (L × W × H) | 1020 × 510 × 1060mm |
| 重量 Weight | 约100kg Approx. 100kg |
| 电源 Power | 1±, 220V, 50Hz, 2A |