


# XY-U060882401M

## Appearance



## Dimensions/mm

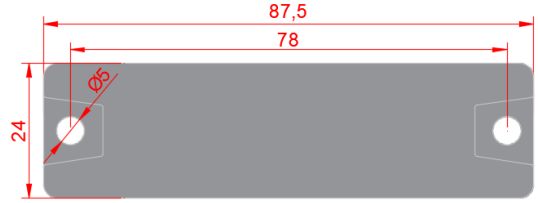


## RF Specifications

Item	Description	Remark
Chip	MR6-P	
Protocol	ISO/IEC18000-6C	
Memory	TID	96bits
	EPC	128bits
	USER	32bits
Frequency Range with the best performance	865-868MHz;902-928MHZ	
IC Life	Write endurance of 100,000 cycles Data retention of 50 years	

## Physical Specifications

Item	Description	Remark
Product Dimensions	87.5*24mm	
Thickness	11.5mm	
Housing material	ABS	
IP Rating	IP65	
Application temperature	-40 ~ 80°C	
Operating temperature	-40 ~ 70°C	
Customization	Logo printing or laser printing or encoding ...	
Package	50pcs/bag or customized	

## Read Range

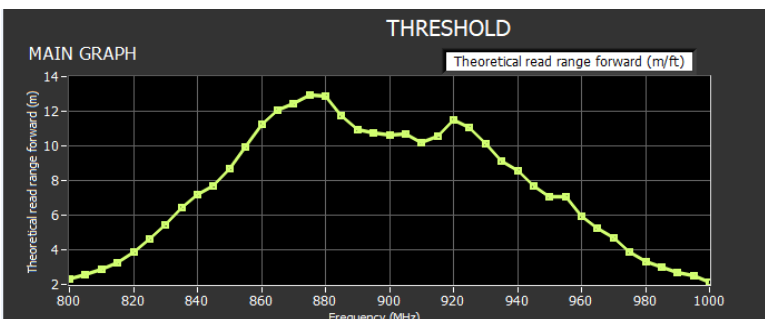

## Application

