



WSL-G2 | All in One Solar Powered LED Streetlight


PRODUCT DIMENSIONS

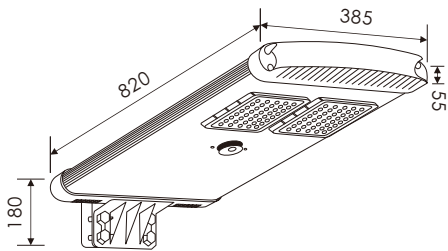


MODEL: WSL-30G2 | mm

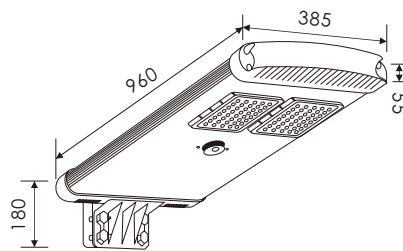


MODEL: WSL-40G2 | mm

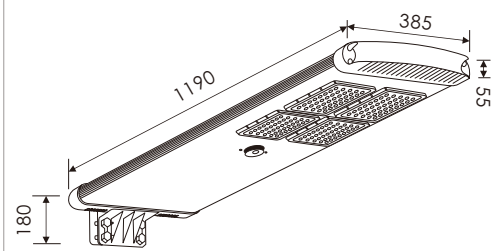

MODEL: WSL-50G2 | mm
MODEL: WSL-60G2 | mm

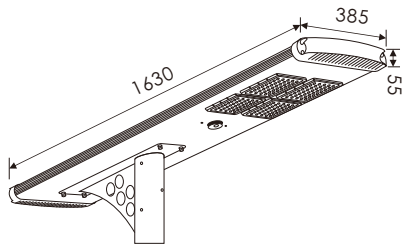


MODEL: WSL-80G2 | mm

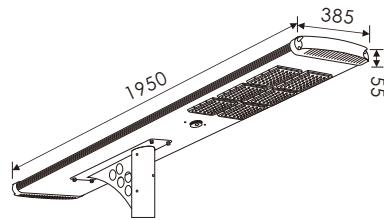

MODEL: WSL-100G2 | mm
MODEL: WSL-120G2 | mm


LIGHT DISTRIBUTION CURVE

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

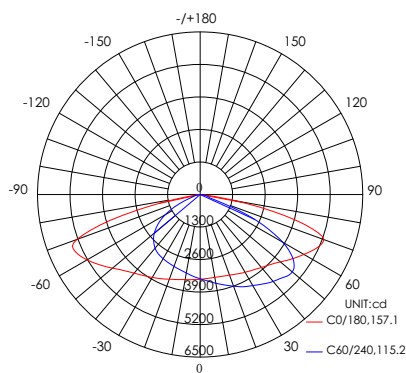

AVERAGE BEAM ANGLE(50%):135.5 DEG

MAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM

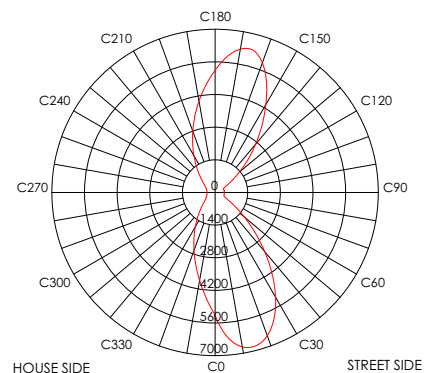

Max @ = 70.0DEG

KEY PARAMETERS

MODEL	FLUX	CCT	CRI	PV	BATT	IP RATING	SENSOR	WORKING TEMP	NW
WSL-30G2	4,800LM	3,000~7,000K	>80RA	50W	300Wh	IP65	MWS	-25°C~65°C	12.5KG
WSL-40G2	6,400LM	3,000~7,000K	>80RA	65W	310Wh	IP65	MWS	-25°C~65°C	13.6KG
WSL-50G2	8,000LM	3,000~7,000K	>80RA	70W	400Wh	IP65	MWS	-25°C~65°C	16.7KG
WSL-60G2	9,600LM	3,000~7,000K	>80RA	80W	460Wh	IP65	MWS	-25°C~65°C	17.0KG
WSL-80G2	12,800LM	3,000~7,000K	>80RA	100W	630Wh	IP65	MWS	-25°C~65°C	20.0KG
WSL-100G2	16,000LM	3,000~7,000K	>80RA	130W	700Wh	IP65	MWS	-25°C~65°C	27.4KG
WSL-120G2	19,200LM	3,000~7,000K	>80RA	140W	800Wh	IP65	MWS	-25°C~65°C	28.4KG