

(Specification): 7/0.127T*2C+7/0.10T*1C+7/0.20T*2C+F+ADB16/7/0.08T OD:4.0

(Component)		COMPONENT A	COMPONENT B	COMPONENT C
(Conductor)	(Constitution) AWG/mm	7/0.127 (28AWG)	7/0.10T (30AWG)	7/0.20T (24AWG)
	(Material)	TINNED COPPER STRANDED	TINNED COPPER STRANDED	TINNED COPPER STRANDED
	(Cabling OD) mm	0.38 (REF)	0.30 (REF)	0.61 (REF)
(Insulation)	(NO of wire)	2	1	2
	(Material)	HD-PE	HD-PE	HD-PE
	(OD) mm	0.82±0.05	0.50±0.05	0.90±0.05
	(Thickness) mm	0.22 (REF)	0.10 (REF)	0.15 (REF)
	(Color)	1. WHITE 2. GREEN	3. BLUE	4. RED 5. BLACK
(Shield)	(Filler)	FILLER		
	(AL/MYLAR)	AL. FACE OUTSIDE		
	(Drain)	7/0.127T (28AWG)		
	(Constitution) N/mm	16/7/0.08T		
	(Material)	TINNED COPPER WIRE		
	(Coverage) %	85%		
(Jacket)	(OD) mm	4.0±0.20		
	(Material)	TPE		
	(Thickness) mm	0.50 (REF)		
	(Marking)	NO MARKING		
	(Color)	WHITE		

UL (Style)


(Electric Characters):

1. Voltage rating: 30V
2. Temperature rating: 80°C
3. Spark test: AC-1500V/In the air
4. Dielectric strength: AC-500V/1 sec MIN
5. Insulation resistance: PE DC-500V 100MΩ.KM MIN. at 20°C
6. Conductor resistance: 28AWG-237 Ω/KM MAX at 20°C, 30AWG-376 Ω/KM MAX at 20°C, 24AWG-93 Ω/KM MAX at 20°C

(Physical Characters):

(Diagram):

(CUSTOMER'S SIGN):

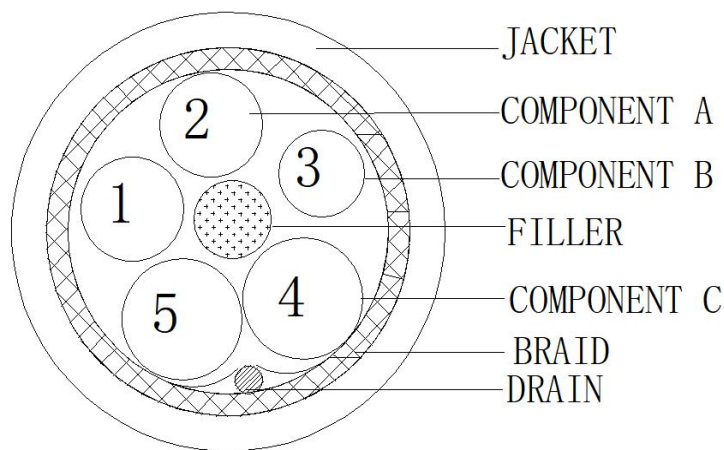

	(FULL APPROVED)	(REJECTED)
(CUSTOMER'S SIGN)		
(NOTE)		

P-SHINE ELECTRONIC TECH LTD

APPROVE:	MPN: PSUSB2024328GLT
AUDITING:	EDITION: S0050373
DRAWING: REN	DATE: 2020.01.13