



Customer Name:

| REV | ZONE | DESCRIPTON     | APPVD | DATE         |
|-----|------|----------------|-------|--------------|
| VO  |      | INITAL RELEASE |       | 2023. 12. 15 |

A

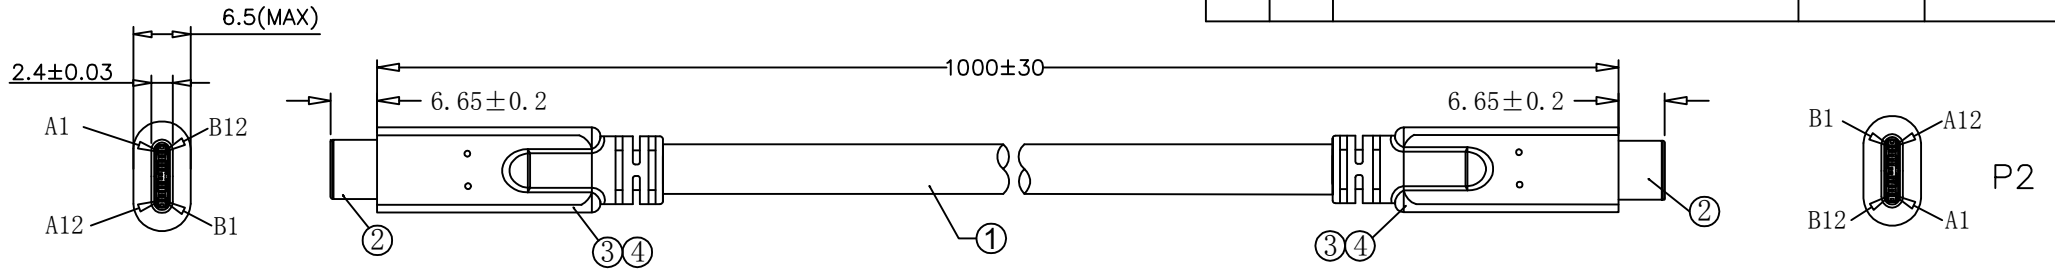

B

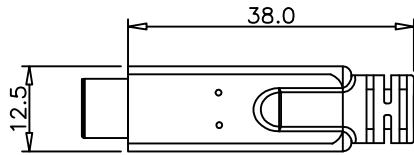


C

NOTE:

- TESTING CONDITIONS:
  - A: INSULATION RESISTANCE: 5MΩ MIN
  - B: VOLTAGE: DC300V/0.01S
  - C: CONDUCTOR RESISTANCE 3Ω
  - D: 48V/5A (240W)
- ROHS
- 1 PCS/PE Bag

WIRE TABLE

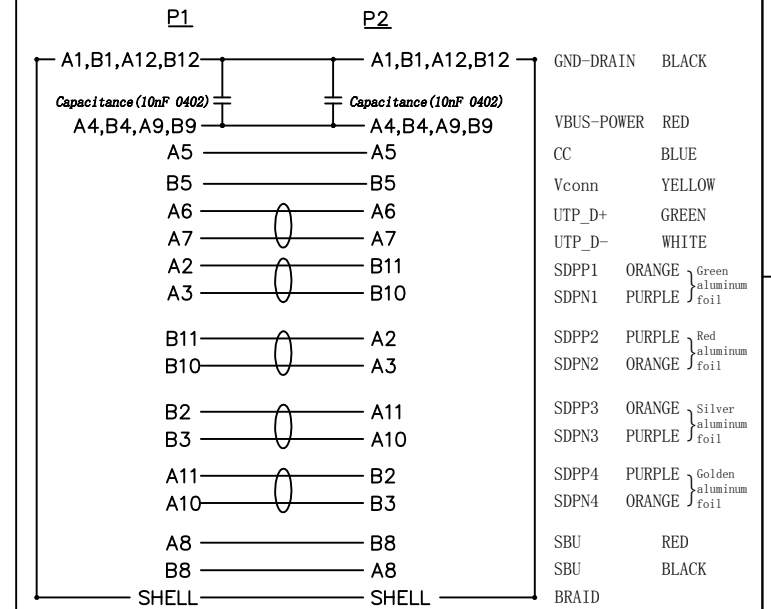

D

| NO. | ITEM           | DESCRIPTION  | QTY | UNIT |
|-----|----------------|--|-----|------|
| 4   | Over Model     | 35P BLCK PVC   | X   | G    |
| 3   | Internal Model | Transparent PE material  | X   | G    |
| 2   | Plug           | USB 3.1 Type-C Male Black Insulator Sheel: NI-Plated Capacitance(10nF±10% 0402) (TYPE C FF)                  | 2   | SET  |
| 1   | Cable          | (1/0. 20B*1P+D+AL+HM)*4C+1/0. 20B*1P+1/0. 20B*4C+7/0. 20B*2C +F+D+AB16/5/0. 08T, OD:5.00mm, Black PVC Jacket | 1.5 | M    |

| Symbol   | TOLERANCE |     |
|----------|-----------|-----|
|          | INCHES    | M/M |
| . X      | .015      | .30 |
| . XX     | .010      | .10 |
| . XXX    | .005      | .05 |
| ANGLE    | ±         | 1°  |
| Drawn by |           |     |
| Check by |           |     |
| Appd by  |           |     |

**P-Shine P-Shine Electronic Tech Ltd**

Model name: **USB 3.2 Type C Male to C Male (240W) Cable**

| SCALE | NONE | DRAWING NO. :         | REV.  |
|-------|------|-----------------------|-------|
|       |      | <b>HSQ3121503</b>     | VO    |
| UNIT  | mm   | MPN:                  | SHEET |
|       |      | <b>PSCMCM-1000-AU</b> | 1/1   |
| SIZE  | A4   | Customer P/N:         |       |