



COUNTER FLOW FILM FILL



LAN series

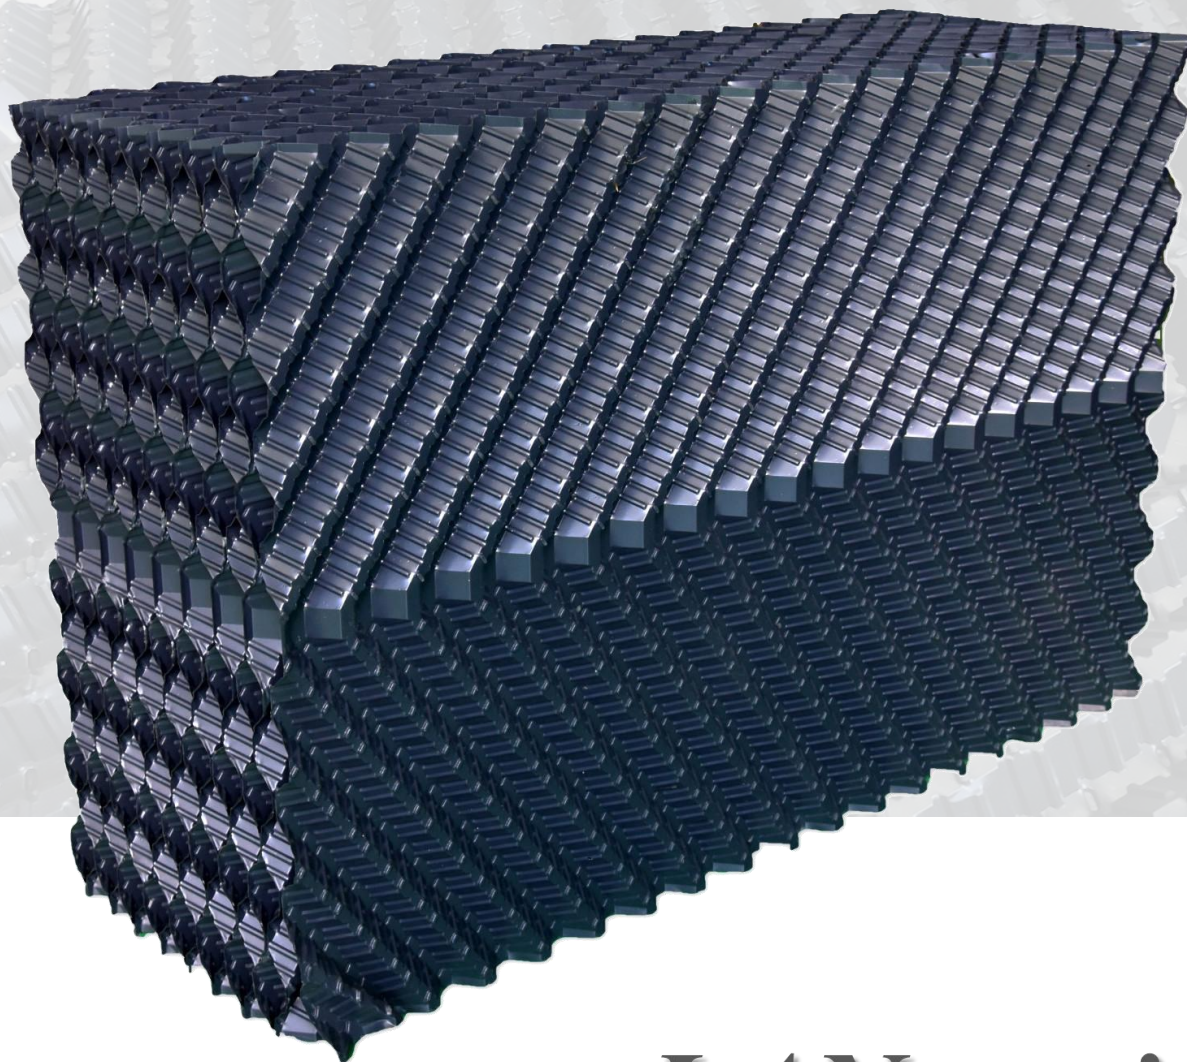

NEWIN
All About Cooling Tower

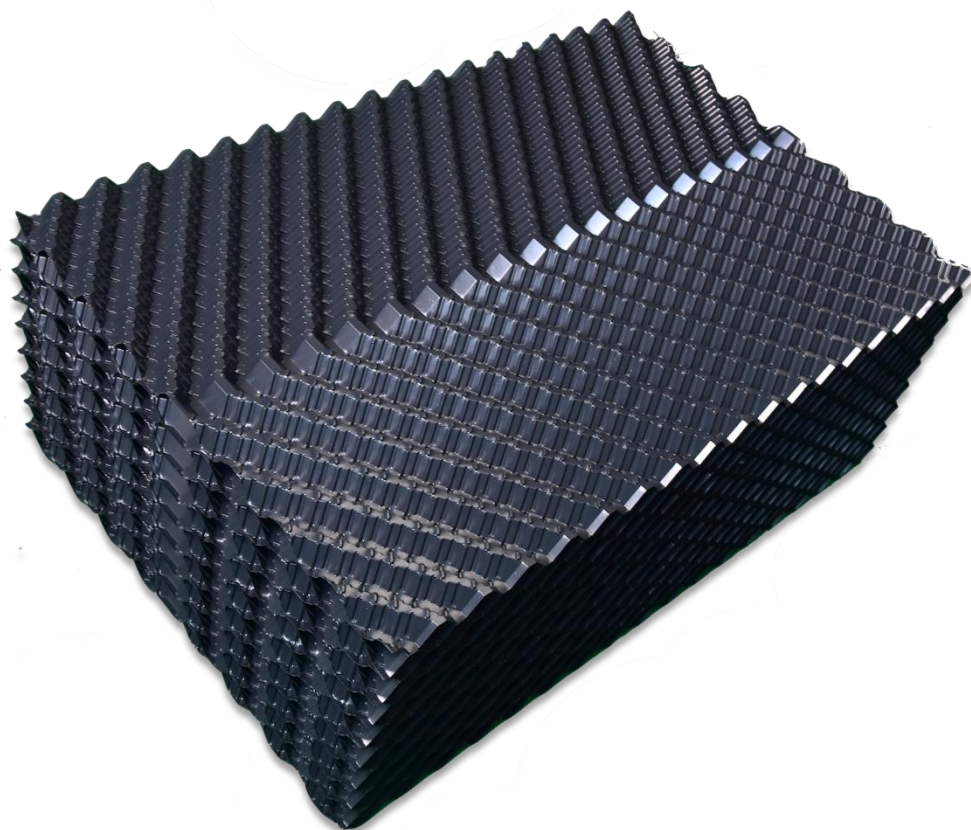

Newin LAN Film Fill is widely used in counter flow cooling towers, the product is a cellular block after bonding molding, according to the interval size of the tower bracket, cut into different sizes. Easy to installation. High heat exchange efficiency, small wind resistance, no-easy plugged. PVC, PP material are both available. Customers can choose according to cooling media temperature.

Applicable for LiangChi cooling tower series of LDCM, LDC, LDC-EPC, LNCM with SGS test to keep high quality infill to get the high efficiency of the cooling tower. Inform us the tower model or size, we will estimate the Nos of sheets needed for your cooling tower replacing.

Shenzhen Newin Machinery Co., Ltd.

No.510, Building 12, Tiedong, China South City,
Pinghu, Longgang, Shenzhen, China. 518100
0086 755 23077266 | www.newinmachine.com


Pictures in Details

Newin supplies customized service for different request on film fill length, width, material or thickness. Standard flat material thickness in 0.32mm thickness and Newin developed a new technology solution for high inlet water temperature condition.






Adopt PVC material, film type heat dissipation material, adopt unique wave design.

The surface is smooth and bright, pressure strength is strong, it will not break when touched, non-toxic and non-irritating, more safer.

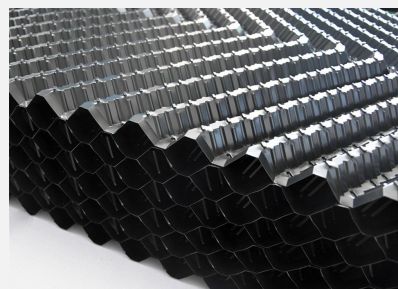

Fully solve gas-liquid exchange, reasonable design, not easy to hide dirt, easy to install.

Unique bonding technology allows the fills to stick together tightly. Newin can provide blocks, also can provide sheets, PVC glue, guide video, customers can glued blocks on the site.

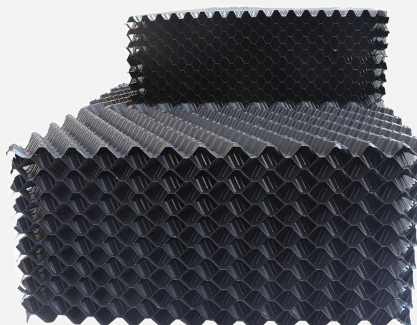

KA has a high volumetric bulk coefficient, good heat transfer efficiency, and can provide the largest water-gas heat exchange area, and at the same time has a good air flow through, which minimizes the static pressure of ventilation.

The heat dissipation material adopts a block-shaped assembly structure, which is lightweight and easy to assemble, disassemble and clean.

Complete specifications, according to customer requirements, custom specifications and sizes to meet the needs of different fields.


Shenzhen Newin Machinery Co., Ltd.

No.510, Building 12, Tiedong, China South City,
Pinghu, Longgang, Shenzhen, China. 518100
0086 755 23077266 | www.newinmachine.com

Properties


Newin supplies customized service for different request on film fill length, width, material or thickness. Standard flat material thickness in 0.32mm thickness and Newin developed a new technology solution for high inlet water temperature condition.

Module Length (Max)	mm	3660
Module Width	mm	305/610
Module Depth	mm	—
Flute Height	mm	19
Flute Corrugation Angle	degrees	—
Surface Area	m ² /m ³	150
Sheet Thickness - Before Forming	mm	0.32
Sheet Thickness - After Forming	mm	0.28
Max. application temp. (short time) - PVC	° C	60
Max.operating temp. (short time) - PP	° C	95
Customized thickness available for special request. Contact Newin for details!		

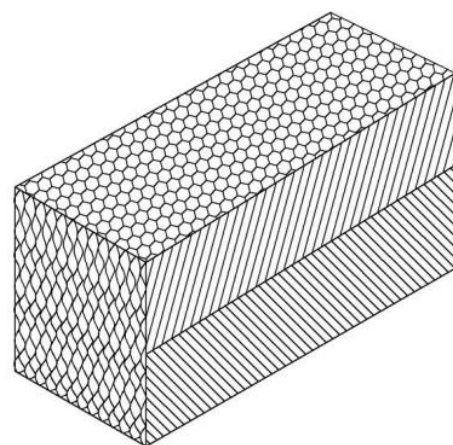

Applicable Commercial Standards

Sheets material is strictly followed below SGS test with ASTM standards. Each property or all properties as below tested by your products are also available on request.

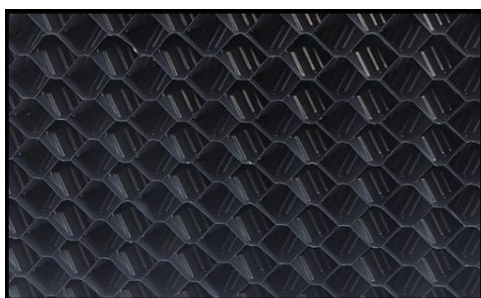

Property	Test Method	Values	
Specific Gravity	ASTM D792-13 Method B	1.426g/cm ³	
Oxygen Index	ASTM D2863-13	34.50%	
Tear Strength	ASTM D1004-13	X direction	111N
		Y direction	121N
Tensile Test	ASTM D 882-12	Tensile Strength	X direction 51.1MPa
			Y direction 45.3Mpa
		Elongation at Break	X direction 87%
			Y direction 56%


Values shown above based on SGS Test No.: GZIN1708039662PS by Newin
Statements and methods presented are based upon the best available information and practices known to Newin. Conditions of use may vary and are beyond control, the user should undertake sufficient tests to determine the suitability for any intended use of the material.

Shenzhen Newin Machinery Co., Ltd.

No.510, Building 12, Tiedong, China South City,
Pinghu, Longgang, Shenzhen, China. 518100
0086 755 23077266 | www.newinmachine.com

Field Data for Counter Flow Film Fill Replacement

Fill in below measurements data for your maintenance cooling tower or repairing projects demand quality and reliability, count on Newin, site visit or maintenance service, engineered to fit the cooling tower fills or components.

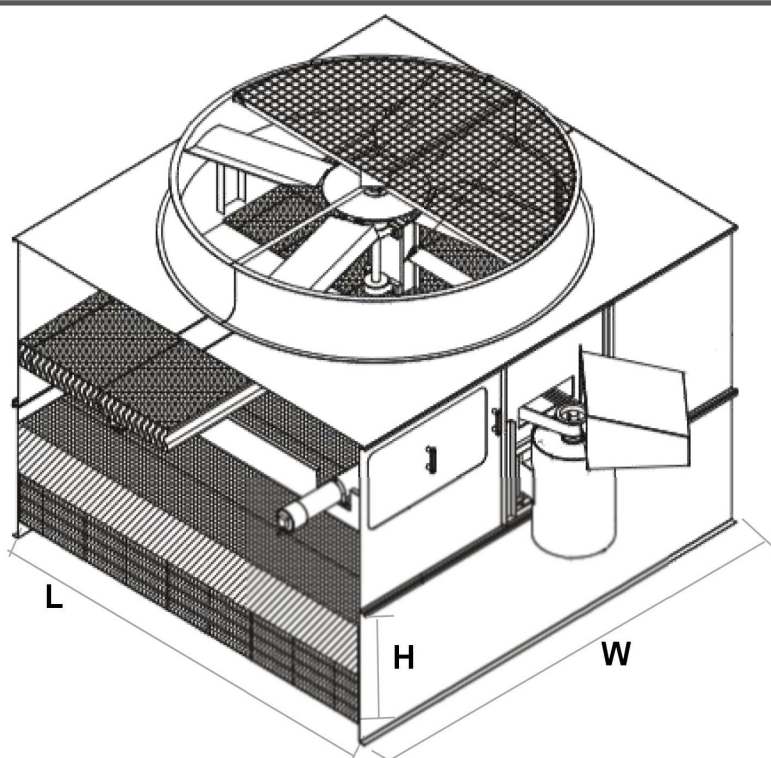

Field Data for Counter Flow Fill Replacement

Dimension	Description	Field Measurement
L	Inside casing length	
W	Inside casing width	
H	Inside fill space total height	
Nos of Cells		

Shenzhen Newin Machinery Co., Ltd.

Drawing No.

NW-2005035-Fill

Shenzhen Newin Machinery Co., Ltd.

No.510, Building 12, Tiedong, China South City,
Pinghu, Longgang, Shenzhen, China. 518100
0086 755 23077266 | www.newinmachine.com

Reference List

Newin supplies production and replacement service worldwide to satisfy different customers' request. One - stop supply for all cooling tower with parts and service.



Shenzhen Newin Machinery Co., Ltd.

No.510, Building 12, Tiedong, China South City,
Pinghu, Longgang, Shenzhen, China. 518100
0086 755 23077266 | www.newinmachine.com

Jobsite Storage Procedures for PVC Film Fills

1. Guidelines for the Storage of Nested Sheets

a. Fill sheets cannot be exposed to direct sunlight for any length of time when client received. The solid block of plastic created by the nested sheets will absorb heat rapidly and distort the exposed edges. **Inside ventilated environment storage is strongly recommended.**

b. If inside ventilation not possible then use of heavy duty tarps or waterproof board as to cover. **Clear or black covers must not be used, and covers must not be wrapped tightly around the nested sheets.**

c. Do not stack more than five feet (1.5m) high, supported on flat level ground is required. All fill sheets must remain clean and dry prior to assembly.

※ Newin shipped PVC film fills use pallet with sun protection films or wood box to avoid the fills exposed to sunlight directly.



2. Guidelines for the Storage of Assembled Product

a. Modules must not be stored in any environment where the air temperature exceeds 49°C (120°F). When considering outside storage, the skin temperature of modules must not be allowed to reach more than 60°C (140 °F). Due to solar heat gain, the dark PVC material rapidly absorbs the sun's energy, the surface temperature is higher than ambient.

b. Modules must be stacked such that the plane of the sheets are in the vertical position, similar to the manner of their position in cooling tower.

c. Modules requiring storage outside must be covered .
·Clear or black covers must not be used.
·Covers must not be wrapped tightly around the media.

Shenzhen Newin Machinery Co., Ltd.

No.510, Building 12, Tiedong, China South City,
Pinghu, Longgang, Shenzhen, China. 518100
0086 755 23077266 | www.newinmachine.com