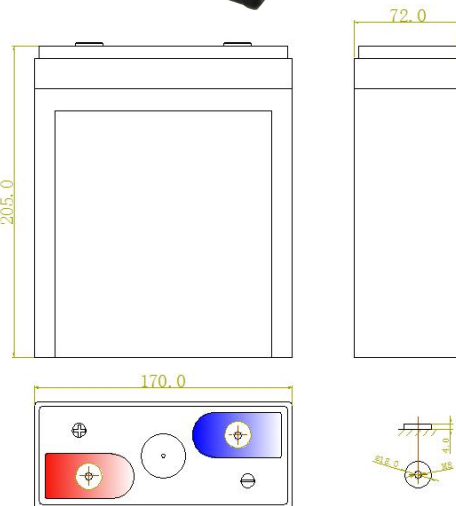


GF-100
2V100Ah
产品特点 Product features

额定电压 Normal voltage		2V
额定容量度 Normal capacity (10 hr)		100Ah
容量 Capacity 25°C(77°F)	10hr (10A)	≥100Ah
	3hr (25A)	≥75Ah
	1hr (55A)	≥55Ah
内阻 Inner resistance	Full charge 25°C(77°F)	≤1.2mΩ (仅供参考)
循环使用寿命 Cycling Service life	(GB/T 19638.1-2014) deep discharge	≥800 cycles
浮充使用寿命 Floating charge life	25°C(77°F)Voltage of Floating charge: 13.8V	≥6 years
温度的影响 Temperature works on capacity (10 hr)	40°C (104°F)	≥105%
	25°C (77°F °F)	≥100%
	0°C (32°F)	≥85%
	-15°C (5°F)	≥70%
荷电保持 Self-discharge 25°C(77°F)	Residual Capacitance (90 days)	≥80%
气体析出量 Amount of gas evolution 25°C(77°F)	testing standard GB/T 19638.1-2014 U _{flo}	≤0.04ml/(Ah · h)
大电流耐受能力 maximum discharge current 25°C(77°F)	放电时间 discharge time 5sec	≥300A
充电方法 Charge method 25°C(77°F)	循环使用 Cycling	初始电流≤25A,恒压 2.40-2.47V Beginning current ≤25A, Isobarically 2.40-2.47V
	浮充使用 Floating charge	恒压 2.25-2.30 Isobarically 2.25-2.30V

阀控式密封铅酸蓄电池

valve-regulated lead acid battery


包装尺寸 Package dimension

电池尺寸 dimension (L*W*H*TH)	mm±1	171*72*205*225
	inch	5.13*2.16*6.15*6.75
外包装尺寸 Box dimension (L*W*H)	mm	175*150*240
	inch	5.25*4.5*7.2
每箱电池数 PCS/Carton		2
单个净重 Net weight		5.0kg±3%

材料 Product material

成份 Component	正极板 Anode plate	负极板 Cathode plate	外壳 crust	安全阀 valve
材料 Material	铅化合物 Lead dioxide	铅 lead	ABS	橡胶 rubber
成份 Component	端子 terminal	隔板 separator	电解液 electrolyte	---
材料 Material	铜合金 Cu-alloy	玻璃纤维 AGM	硫酸 Sulfuric acid	---

以上各项参数仅供参考，如有更改不另行通知。

恒流放电特性 Constant Current Discharge Characteristics : A(25°C)

电压/时间	10min	30min	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	211	114	60	35	25.7	20.0	16.5	11.6	11.2	5.70
1.70V	190	111	56.4	33.4	25.0	19.5	16.2	11.4	10.5	5.67
1.75V	160	102	55	32.6	24.4	19.2	16.0	11.3	10.2	5.53
1.80V	160	94	53	31.8	23.8	18.9	15.6	11.0	10.0	5.46
1.85V	150	84	50	31.0	23.0	18.3	15.2	10.7	9.75	5.40

恒功率放电特性 Constant Power Discharge Characteristics : W(25°C)

电压/时间	10min	30min	1HR	2HR	3HR	4HR	5HR	68HR	10HR	20HR
1.60V	391	204	116	68	50	39	32	22	20	10.9
1.70V	376	202	109	64	48	38	31	22	20	10.7
1.75V	364	190	105	63	47	37	31	22	20	10.5
1.80V	350	183	101	62	46	36	30	21	19	10.5
1.85V	344	182	98	61	46	36	30	21	19	10.2

图-1 浮充使用充电特性曲线

Charging Characteristics

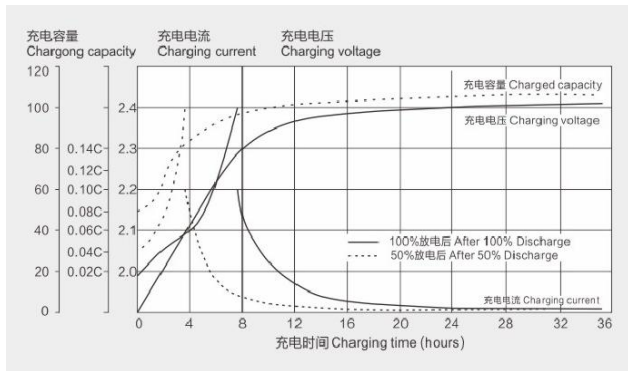


图-3 温度寿命特性

Temperature Life characteristic

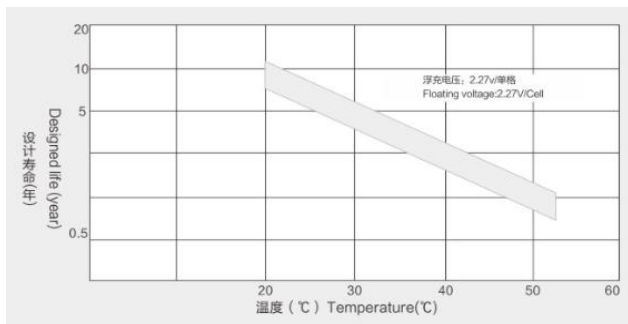


图-5 放电深度对循环使用寿命的影响

Depth of disharg effects

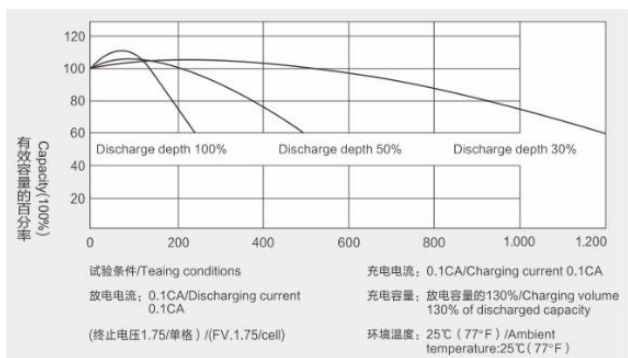


图-2 放电特性曲线

Discharge characteristic curves

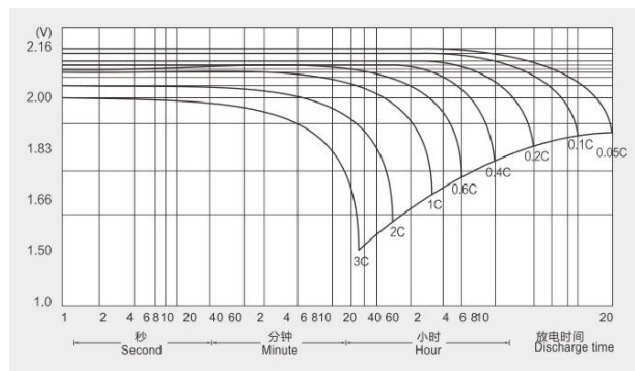


图-4 自放电特性及补充电方法

Self discharge characteristic and supplementary method

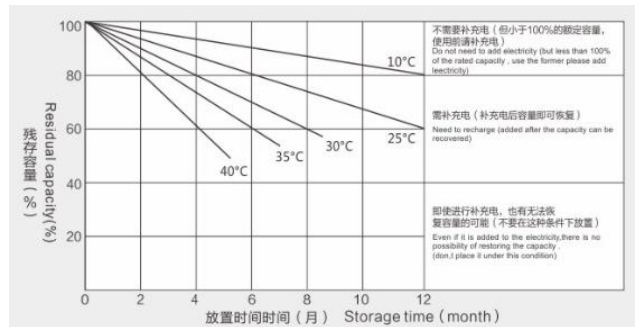


图-6 循环寿命

Cycle life

