

MODEL HIPA33504520

33-50GHz Medium Power Amplifier



Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band: 33-50GHz
- Gain: 45dB
- Output Power P-1: 20dBm
- Bias: Vd= +8~15V; Id= 800mA

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications


Parameter	Min.	Typ.	Max	Units
Frequency Range		33-50		GHz
Small Signal Gain		45		dB
Gain Flatness		±2.5		dB
Input VSWR		1.9		-
Output VSWR		1.9		-
Output Power for 1 dB Compression (P1dB)		20		dBm
Output Power Past		22		dBm
Input Max Power(no damage)			+15	dBm
Noise Figure		4.5		dB
Suprious		-60		dBc
OIP3		30		dBm
DC Current (Vcc=+8~15V)		800		mA
Weight		36.9		g
Impedance		50		Ω
Input Connector/Output Connector		2.4mm-Female		
Material		Aluminum		
Finishing		Gold Plated		
Dimension		1.20" (L) X 1.20" (W) X 0.50" (H)		

Environmental Conditions

Operational Temperature	0°C~+50°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C


Absolute Maximum Ratings

Supply Bias Voltage	15V
RF INPUT POWER	+15dBm
ESD sensitivity (HBm)	Class 0, passed 150V

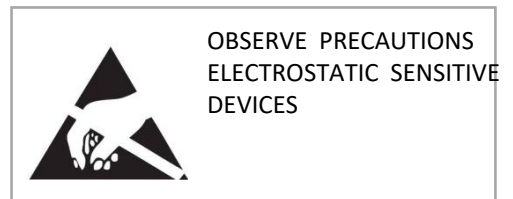

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

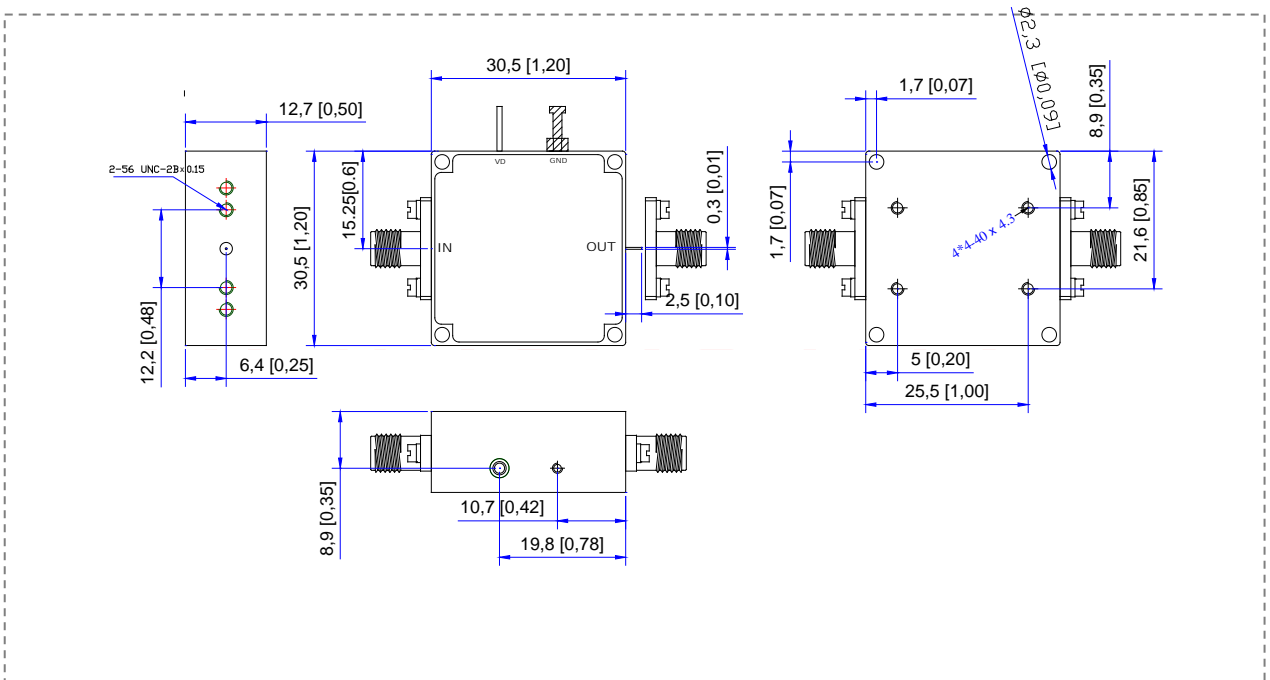

*****Heat Sink required during operation*****