


MODEL HIPA35473520B

35-47GHz Medium Power Amplifier

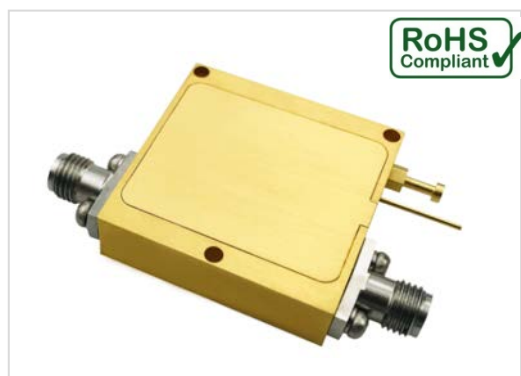

Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 35-47GHz
- Gain: 35dB
- Output Power P-1: 20dBm
- Bias: Vd= +6~16V; Id= 600mA

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range		35-47		GHz
Small Signal Gain		35		dB
Gain Flatness		±2		dB
Input VSWR		1.5		-
Output VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		20		dBm
Output Power Past		22		dBm
Input Max Power(no damage)			-10	dBm
NF		4.5		dB
Suprious		-60		dBc
OIP3		30		dBm
DC Current (Vcc=+6~16V)		600		mA
Weight		36.9		g
Impedance		50		Ω
Input Connector/Output Connector		2.4mm-Female		
Material		Aluminum		
Finishing		Gold Plated		
Dimension		1.2" (W) X 1.2" (L) X 0.5" (H)		

Environmental Conditions

Operational Temperature	0°C~+50°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings


Supply Bias Voltage	16V
RF INPUT POWER	-10dBm
ESD sensitivity (HBm)	Class 0, passed 150V



OBSERVE
PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

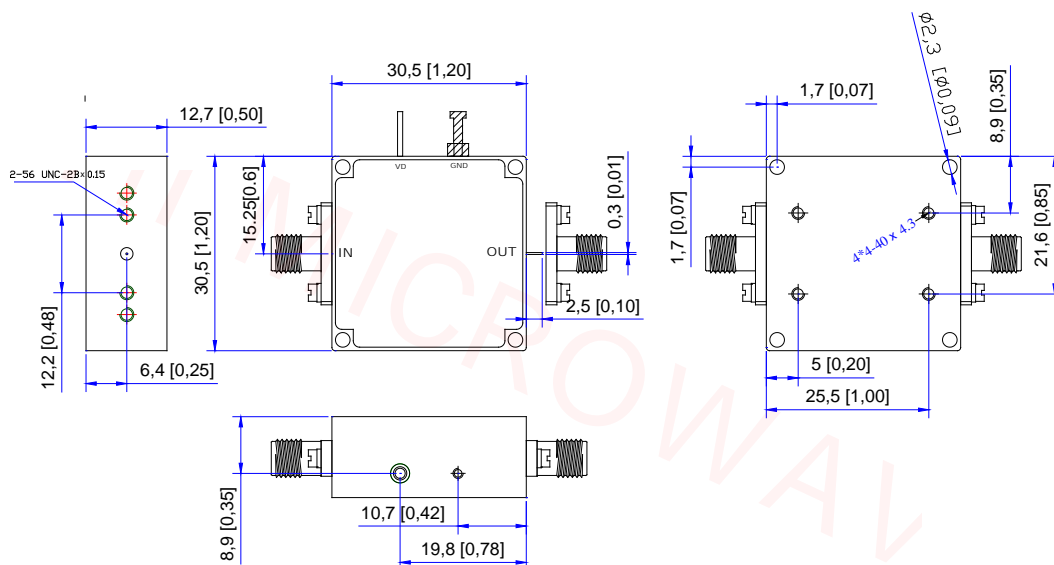

*****Heat Sink required during operation*****