

MODEL HIPA40601520

40-60GHz Medium Power Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 40-60GHz
- Gain: 15dB
- Output Power P-1: 19dBm
- Bias: Vd= +6~15V; Id= 300mA

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range		40-60		GHz
Small Signal Gain		15		dB
Gain Flatness		± 1.5		dB
Input VSWR		1.9		-
Output VSWR		1.9		-
Output Power for 1 dB Compression (P1dB)		19		dBm
Output Power Past		20		dBm
Input Max Power(no damage)			+23	dBm
Suprious		-60		dBc
OIP3		25		dBm
DC Current (Vcc=+6~15V)		300		mA
Weight		36.9		g
Impedance		50		Ω
Input Connector/Output Connector		V-Female		
Material		Aluminum		
Finishing		Gold Plated		
Dimension		1.20" (W) X 1.20" (L) X 0.50" (H)		

Environmental Conditions

Operational Temperature	0°C~+50°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings


Supply Bias Voltage	15
RF INPUT POWER	+23dBm
ESD sensitivity (HBm)	Class 0, passed 150V



OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

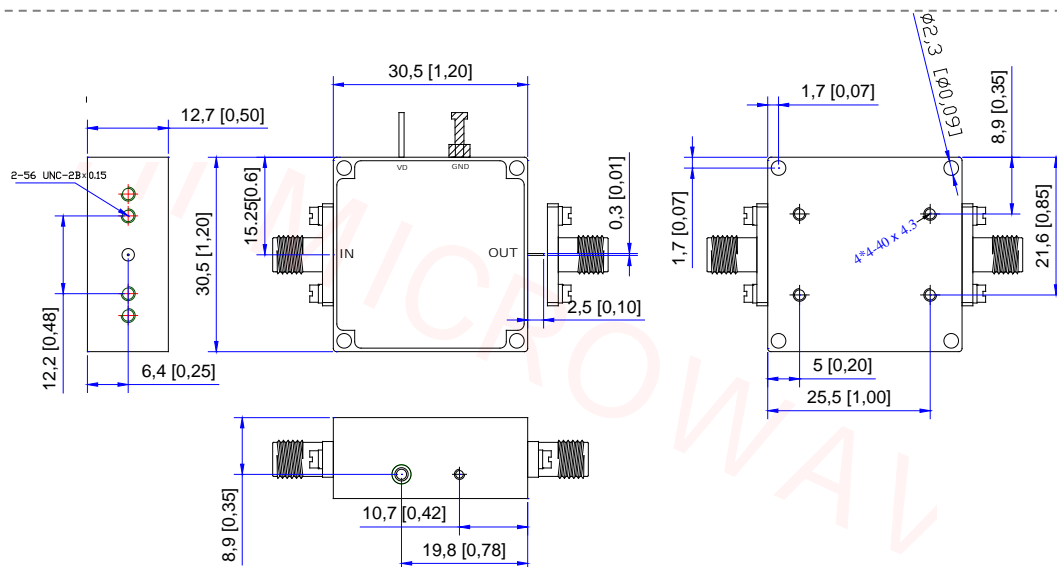

*****Heat Sink required during operation*****