

MODEL HIPAT3063537

0.38-6GHz 10W Power Amplifier



Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Broadband: 0.38-6GHz
- Gain: 35dB
- Output Power Psat: 37dBm

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min	Typ	Max	Units
Frequency Range	0.38-6			GHz
Small Signal Gain	35			dB
Gain Flatness		± 2.5	± 4	dB
Input VSWR		1.5	2.5	-
Output Power for 1 dB Compression (P1dB)		35		dBm
Saturated Output Power (Psat)	37			dBm
Harmonic Rejection		15		dB
Spurious		-60		dBc
Input Max Power(no damage)			8	dBm
DC Current (Vcc=+30V) (@Pout=10W)		2		A
Impedance	50			Ω
Input / Output Connector	SMA-K / SMA-K			
Material	Aluminum			
Weight	\			
Dimension	125mmX95mmX12mm			

Environmental Conditions

Operational Temperature	-30°C~+70°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-45°C~+85°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings


Supply Bias Voltage	+32V
RF INPUT POWER	+8dBm
ESD sensitivity (HBm)	Class 0, passed 150V



OBSERVE
PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

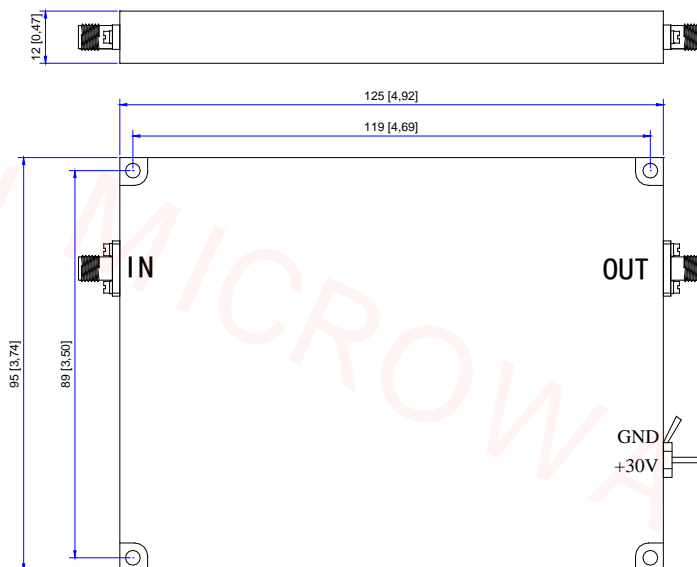

*****Heat Sink required during operation*****