

MODEL HIPA01023533

1-2.5GHz Power Amplifier



Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band: 1-2.5GHz
- Gain: 35dB
- Output Power Past: 33dBm

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	1-2.5			GHz
Small Signal Gain	35			dB
Gain Flatness		± 1.5	± 2.0	dB
Input VSWR		1.5	2.0	-
Output Power for 1 dB Compression (P1dB)	30			dBm
Saturated Output Power (Psat)	33			dBm
Input Max Power(no damage)			10	dBm
Internally Generated Spurious		-60		dBc
DC Current (Vcc=+12V) (@Pout=2W)		1		A
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminium			
Weight	100g			
Dimension	85X50X12mm			

Environmental Conditions

Operational Temperature	-35°C~+70°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	+30V
RF INPUT POWER	+10dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE
PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

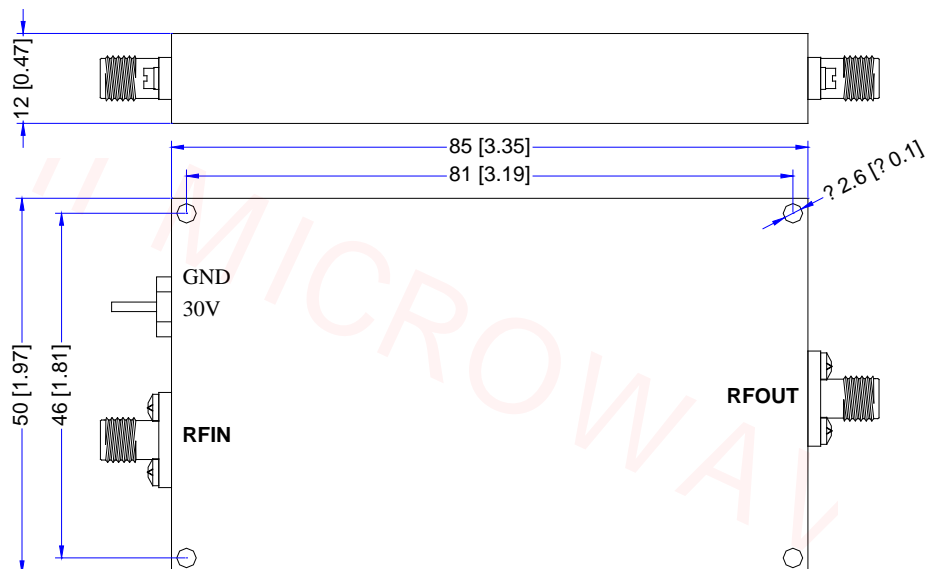

*****Heat Sink required during operation*****