


MODEL HIPA24304040

24-30GHz Broadband Power Amplifier

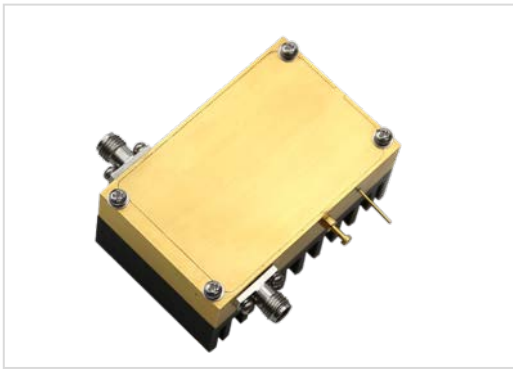

Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band: 24-30GHz
- Gain: 40dB
- Output Power Psat: 40dBm
- Bias: Vd=28V;Id=5A

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems


□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	24-30			GHz
Small Signal Gain	40			dB
Gain Flatness		±2		dB
Input VSWR		2.0		-
Output Power for 1 dB Compression (P1dB)		38		dBm
Saturated Output Power (Psat)	40			dBm
Input Max Power(no damage)			5	dBm
Internally Generated Spurious		-60		dBc
DC Current (Vcc=+28V) (@Pout=10W)		5		A
Impedance	50			Ω
Input Output Connector	2.92-k			
Material	Aluminium			

Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C


Absolute Maximum Ratings

Supply Bias Voltage	+32V	 <p>OBSERVE PRECAUTIONS ELECTROSTATIC SENSITIVE DEVICES</p>
RF INPUT POWER	+5dBm	
ESD sensitivity (HBm)	Class 0, passed 150V	



Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

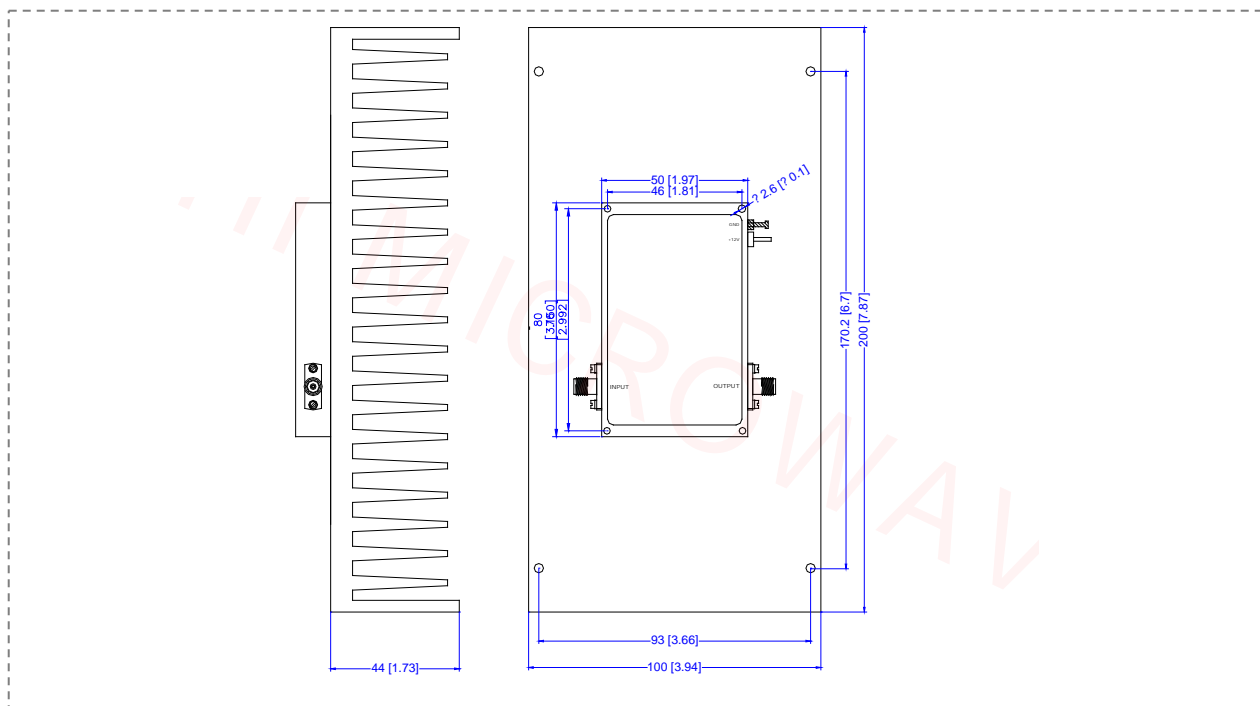

*****Heat Sink required during operation*****