



Note: The photo is for illustration purposes only.  
Please refer to outline drawing

### ■ Features

- Ultra Wide Band:
- Gain: 24dB
- Output Power: 18dBm
- High Output IP3: 34dBm

### ■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

### □ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	2~4			GHz
Gain	23		26	dB
Gain Flatness		±1	±1.5	dB
Gain Variation Over Temperature		±1		dB
Input VSWR		1.8	2.2	
Output VSWR		1.8	2.0	
Output Power for 1 dB	18	20		dBm
Saturated Output Power (Psat)		21		dBm
Noise Figure		0.7	1	dB
OIP3	32	34		
Input Max Power(no damage)			0	dBm
Reverse Isolation		50		dB
DC Current (Vcc=+12V)		150	200	mA
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminium			
Weight	50g			
Package Sealing	General Sealing (Standard);			

### Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

### Absolute Maximum Ratings

Supply Bias Voltage	15V
RF INPUT POWER	0dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES



### Outline Drawing

All Dimensions in mm ( inches ) Tolerance  $\pm 0.25$  ( 0.01 )

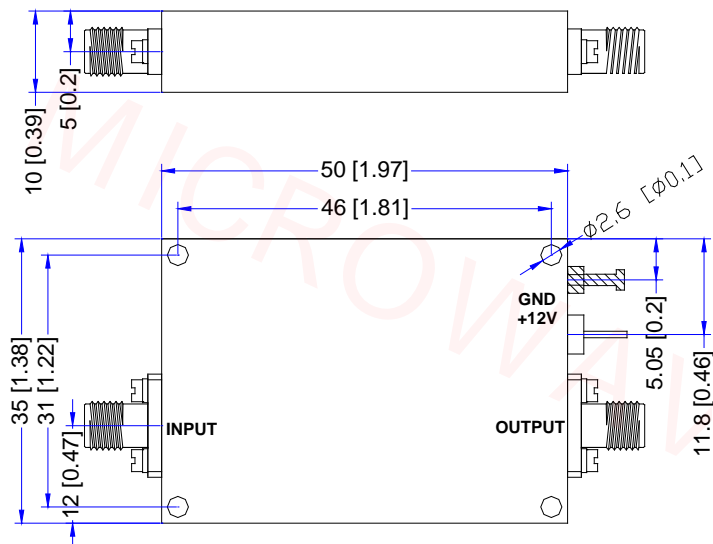

**\*\*\*Heat Sink required during operation\*\*\***