

# MODEL HILNA18263040

## 18-26.5GHz Low Noise Amplifier



Note: The photo is for illustration purposes only.  
Please refer to outline drawing

### ■ Features

- Ultra Wide Band: 18-26.5GHz
- Gain: 30dB
- Output Power: 20dBm
- High Output IP3: 29dBm

### ■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

### □ Electrical Specifications


Parameter	Min.	Typ.	Max	Units
Frequency Range	18~26.5			GHz
Gain	30	32		dB
Gain Flatness		± 1.5	± 2	dB
Input VSWR		1.5	2.0	
Output VSWR		1.8	2.0	
Output Power for 1 dB		20		dBm
Saturated Output Power (Psat)		21		dBm
Noise Figure		4		dB
OIP3		29		
Input Max Power(no damage)			10	dBm
DC Current (Vcc=+12V)		260		mA
Impedance	50			Ω
Input Output Connector	SMA-k/SMA-K			
Material	Aluminium/Gold			
Weight	50g			
Package Sealing	General Sealing (Standard);			

### Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

### Absolute Maximum Ratings

Supply Bias Voltage	15V
RF INPUT POWER	10dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE PRECAUTIONS ELECTROSTATIC SENSITIVE DEVICES



### Outline Drawing

All Dimensions in mm ( inches ) Tolerance  $\pm 0.25$  ( 0.01 )

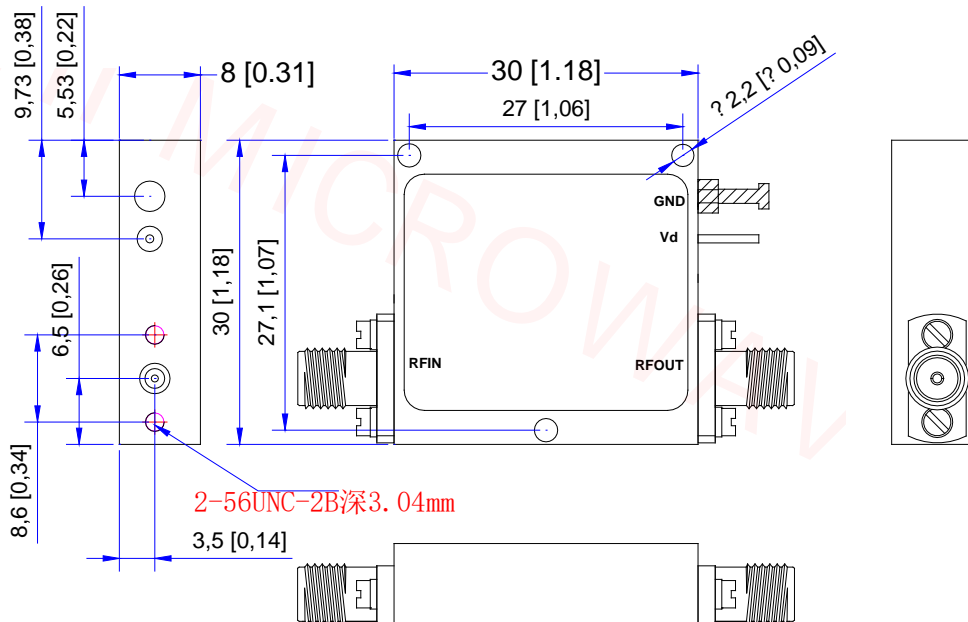

**\*\*\*Heat Sink required during operation\*\*\***