

MODEL HILNA18403035AC

18-40GHz Low Noise AC Amplifier



■ Features

- Ultra Wide Band: 18-40GHz
- Gain: 30dB
- Output Power: 15dBm
- High Output IP3: 20dBm

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications


Parameter同,	Min.	Typ.	Max	Units
Frequency Range	18-40			GHz
Gain	28	30		dB
Gain Flatness		±2.0	±2.0	dB
Input VSWR		2.0	2.2	-
Output VSWR		2.0	2.2	-
Output Power for 1 dB Compression (P1dB)	12	13		dBm
Output Power Past		15		dBm
Noise Figure		3.5	4.5	dB
Output IP3		20		dBm
Input Max Power(no damage)			-15	dBm
AC	110~220/50Hz			
Impedance	50			Ω
Input Output Connector	2.92-k			
Material	Aluminium			
Weight	800g			
Package Sealing	General Sealing (Standard)			

Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	
RF INPUT POWER	-15dBm
ESD sensitivity (HBm)	Class 0, passed 150V

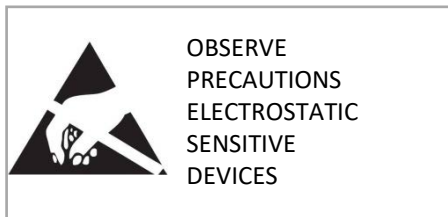

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

