



Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band
- Low Insertion Loss
- High Attenuator Range
- High Attenuator Accuracy

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.5-40			GHz
Insertion Loss		8	12	dB
Attenuation Range	63			dB
Input VSWR		1.8	2.5	
Output VSWR		1.8	2.5	
Switch Speed		1		us
Attenuation Step	1			dB
Control Bit TTL	6			Bit
Attenuation Accuracy	0-15dB ± 0.5 dB; 16-30dB ± 1.5 dB; 31-63dB ± 2.5 dB			dB
Attenuation Flatness	0-15dB ± 0.5 dB; 16-30dB ± 1.5 dB; 31-63dB ± 2.5 dB			dB
Input Max Power(no damage)			23	dBm
DC Power Supply	+12V@150mA, -12V @65mA			mA
Impedance	50			Ω
Input Output Connector	2.92			
Material	Aluminium\Gold Painting			
Weight	50g			
Package Sealing	Epoxy Sealing (Standard) Hermetically Seal(Optional)			

Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave, 3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	± 10%V
RF INPUT POWER	23dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES



Outline Drawing

All Dimensions in mm (inches) Tolerance ±0.25 (0.01)

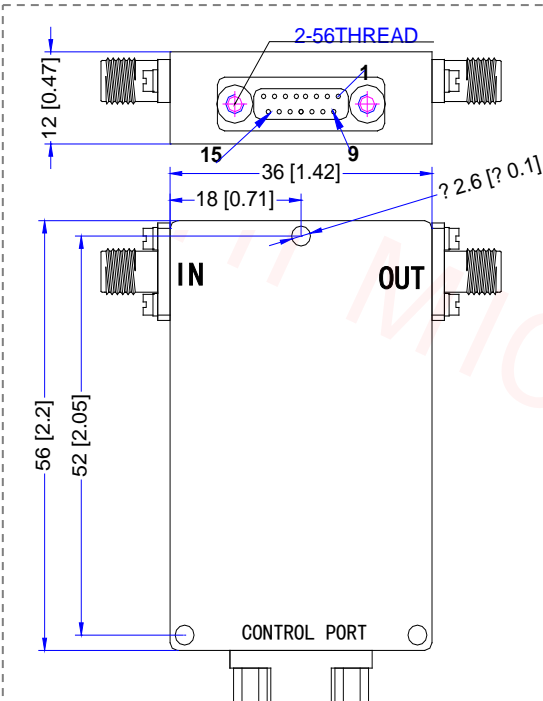

Control Voltage Input						Attenuation state
C6	C5	C4	C3	C2	C1	
0	0	0	0	0	0	Reference IL
0	0	0	0	0	1	1dB
0	0	0	0	1	0	2dB
0	0	0	1	0	0	4dB
0	0	1	0	0	0	8dB
0	1	0	0	0	0	16dB
1	0	0	0	0	0	32dB
1	1	1	1	1	1	63dB

MICRO-D15 Female Define

1	2	3	4	5	6	7	8	9
+12v	-12V	GND	C1	C2	C3	C4	C5	C6
10	11	12	13	14	15			
NC	NC	NC	NC	NC	NC			