

MODEL HIDENT7T408H25

0.4-8GHz Digital Control Attenuator



Note: The photo is for illustration purposes only. Please refer to outline drawing

■ Features

- Ultra Wide Band
- Low Insertion Loss
- High Attenuator Range
- High Attenuator Accuracy

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	0.4-8			GHz
Insertion Loss		7	12	dB
Attenuation Range		90		dB
Input VSWR		1.5	2.0	
Output VSWR		1.5	2.0	
Attenuation Step	0.25			dB
Control Bit TTL	9			Bit
Attenuation Accuracy	±(0.1+4% Atten Setting)			dB
Input Max Power(no damage)			25	dBm
DC Power Supply	+5V@50mA,			mA
Impedance	50			Ω
Input Output Connector	SMA-K			
Material	Aluminium			
Weight	50g			
Package Sealing	Epoxy Sealing (Standard) Hermetically Seal(Optional)			

Environmental Conditions

Operational Temperature	-45°C~+85°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave,3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings

Supply Bias Voltage	± 10%V
RF INPUT POWER	27dBm
ESD sensitivity (HBm)	Class 0, passed 150V




OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES



Outline Drawing

All Dimensions in mm (inches) Tolerance ±0.25 (0.01)

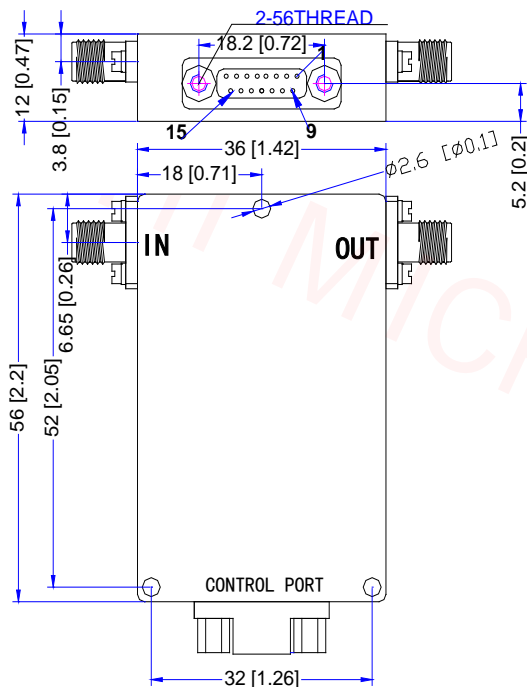

Control Voltage Input									Attenuation state
C9	C8	C7	C6	C5	C4	C3	C2	C1	
0	0	0	0	0	0	0	0	0	Reference IL
0	0	0	0	0	0	0	0	1	0.25dB
0	0	0	0	0	0	0	1	0	0.5dB
0	0	0	0	0	0	1	0	0	1dB
0	0	0	0	0	1	0	0	0	2dB
0	0	0	0	1	0	0	0	0	4dB
0	0	0	1	0	0	0	0	0	8dB
0	0	1	0	0	0	0	0	0	16dB
0	1	0	0	0	0	0	0	0	32dB
1	0	0	0	0	0	0	0	0	64
1	1	1	1	1	1	1	1	1	

DB15 Female Define

1	2	3	4	5	6	7	8	9
+5v	GND	NC	C1	C2	C3	C4	C5	C6
10	11	12	13	14	15			
C7	C8	C9	N	N	N			