

MODEL HILNA33371540

33-37GHz Low Noise Amplifier



Note: The photo is for illustration purposes only.
Please refer to outline drawing

■ Features

- Ultra Wide Band: 33-37GHz
- Gain: 15dB
- Output Power P-1: 12dBm
- Bias: Vd= +6~15V; Id= 110mA

■ Applications

- Radar Systems
- Communication Systems
- Receivers Systems

□ Electrical Specifications

Parameter	Min.	Typ.	Max	Units
Frequency Range	33-37			GHz
Small Signal Gain	10	15		dB
Gain Flatness		±1.0		dB
Input VSWR		1.9		-
Output VSWR		1.9		-
Output Power for 1 dB Compression (P1dB)		12		dBm
Output Power Past	15			dBm
Input Max Power(no damage)			+10	dBm
Noise Figure		4	5.5	dB
Suprious		-60		dBc
OIP3		20		dBm
DC Current (Vcc=+6~15V)		110	150	mA
Weight	45.4			g
Impedance	50			Ω
Input Connector/Output Connector	2.92-k			
RF Port Separation	1.23"			
Material	Aluminum			
Finishing	Gold Plated			
Dimension	1.20" (W) X 1.2" (L) X 0.50" (H)			

Environmental Conditions

Operational Temperature	0°C~+50°C	Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Storage Temperature	-55°C~+125°C	Shock	20G for 11msc half sin wave,3 axis both directions
Executive Standard	MIL-STD-810G	Humidity	100% RH at 35c, 95%RH at 40°C

Absolute Maximum Ratings


Supply Bias Voltage	15V
RF INPUT POWER	+10dBm
ESD sensitivity (HBm)	Class 0, passed 150V



OBSERVE
PRECAUTIONS
ELECTROSTATIC
SENSITIVE
DEVICES

Outline Drawing

All Dimensions in mm (inches) Tolerance ± 0.25 (0.01)

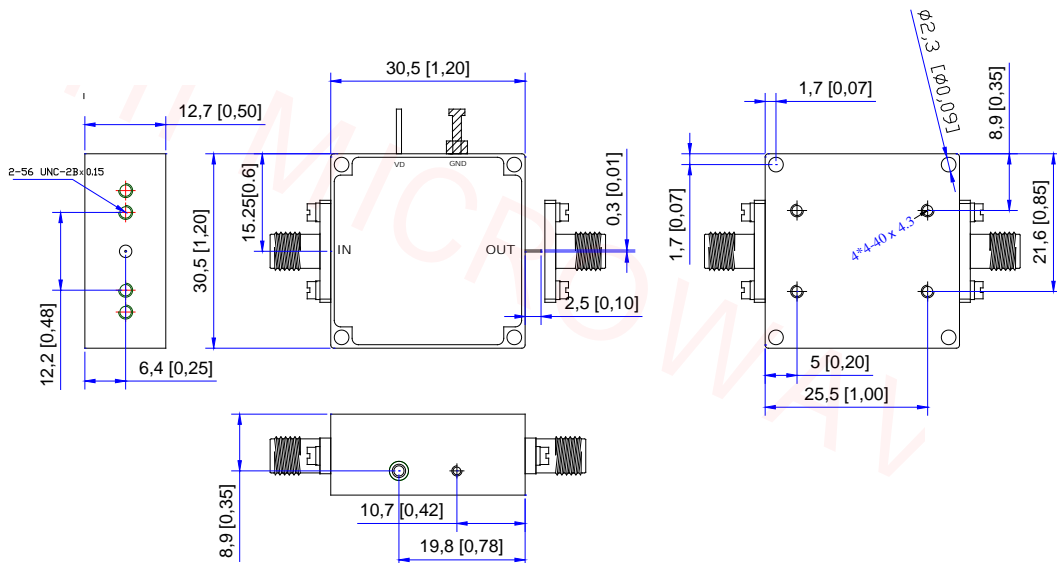

*****Heat Sink required during operation*****